


# Panasonic®

## Operating Instructions

5.8 GHz Expandable Digital Cordless  
Answering System

Model No. **KX-TG6700C**

**2LINE**



This unit is compatible with Call Display. To use this feature, you must subscribe to the appropriate service offered by your telephone service provider.

**Charge the handset battery for 7 hours before initial use.**

Please read these Operating Instructions before using the unit and save for future reference.

For assistance, please call **1-800-561-5505** or visit us at **[www.panasonic.ca](http://www.panasonic.ca)**

**Table of Contents**

<b>Introduction</b>	
Introduction . . . . .	3
Accessory information . . . . .	4
Important safety instructions . . . . .	6
For best performance . . . . .	8
<b>Preparation</b>	
Setting up the base unit . . . . .	9
Setting up the handset . . . . .	12
Controls . . . . .	14
Displays . . . . .	16
Symbols used in these operating instructions . . . . .	17
Setting the unit before use . . . . .	18
<b>Making/Answering Calls</b>	
Making calls . . . . .	20
Answering calls . . . . .	22
Useful features during a call . . . . .	23
Using the other line during a call . . . . .	26
<b>Phonebook</b>	
Handset phonebook . . . . .	27
<b>Base Unit Speed Dialer</b>	
Base unit speed dialer . . . . .	30
<b>Call Display Service</b>	
Using Call Display service . . . . .	31
Caller list . . . . .	32
<b>Programming</b>	
Programmable settings . . . . .	34
<b>Answering System</b>	
Answering system . . . . .	39
Listening to messages using the base unit . . . . .	41
Listening to messages using the handset . . . . .	42
Voice memo . . . . .	44
Remote operation . . . . .	44
Answering system settings . . . . .	46
<b>Multi-unit Operation</b>	
Intercom . . . . .	49
Transferring calls . . . . .	50
Conference calls . . . . .	51
Room monitor . . . . .	53
Registering a handset . . . . .	54
<b>Useful Information</b>	
Additional accessories . . . . .	55
Error messages . . . . .	56
Troubleshooting . . . . .	58
Important information . . . . .	62
Specifications . . . . .	64
Warranty . . . . .	65
<b>Index</b>	
Index . . . . .	66

**Introduction**

---

---

## **Introduction**

**Thank you for purchasing a Panasonic cordless telephone.**

We recommend keeping a record of the following information for future reference.

Serial No. \_\_\_\_\_ Date of purchase \_\_\_\_\_  
(found on the bottom of the base unit)

Name and address of dealer \_\_\_\_\_


**Attach your purchase receipt here.**

## Introduction

# Accessory information

### Included accessories

No.	Accessory item	Quantity
①	AC adaptor	1
②	4-wire telephone line cord with green plugs	1
③	2-wire telephone line cord with transparent plugs	1
④	Battery	1
⑤	Handset cover <sup>*1</sup>	1

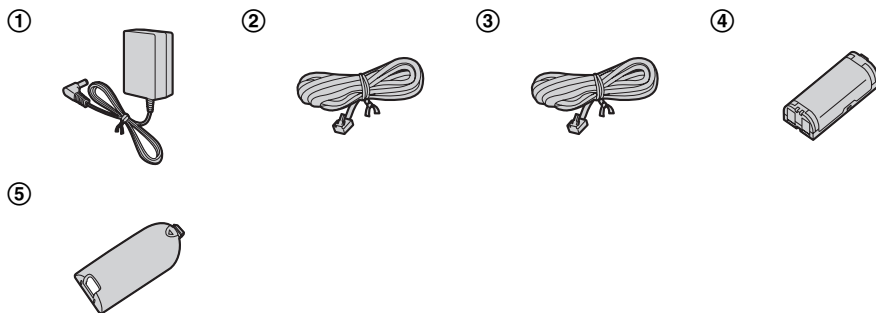

\*1 The handset cover comes attached to the handset.

## Introduction

### Additional/replacement accessories

Accessory item	Order number
Rechargeable nickel metal hydride (Ni-MH) battery	HHR-P105
Headset	RP-TCA86, RP-TCA91, RP-TCA92, RP-TCA94, or RP-TCA95
Belt clip	PQKE10457Z2
Wall-mounting adaptor for base unit	PQKL10078Z2

**Note:**

- You can expand your phone system by registering additional compatible Panasonic units (page 5).


### Expanding your phone system

You can expand the phone system by registering the accessory handsets to a single base unit.

#### Handset (optional): KX-TGA670C

5.8 GHz expandable digital cordless handset:

**Max. 8** (including handset sold with KX-TG6700C base unit)



**Note:**

- References in these operating instructions to “a charger” or “other handsets” are for accessory handset users only.

## Introduction

### Important safety instructions

When using the product, basic safety precautions should always be followed to reduce the risk of fire, electric shock, or personal injury.

1. Read all instructions carefully.
2. Follow all warnings and instructions marked on the product.
3. Unplug the product from power outlets before cleaning. Do not use liquid or aerosol cleaners. Use a moist cloth for cleaning.
4. Do not use the product near water, for example near a bathtub, wash bowl, kitchen sink, etc.
5. Place the product securely on a stable surface. Serious damage and/or injury may result if the product falls.
6. Do not cover slots and openings on the product. They are provided for ventilation and protection against overheating. Never place the product near radiators, or in a place where proper ventilation is not provided.
7. Use only the power source marked on the product. If you are not sure of the type of power supplied to your home, consult your dealer or local power company.
8. Do not place objects on the power cord. Install the product where no one can step or trip on the cord.
9. Do not overload power outlets and extension cords. This can result in the risk of fire or electric shock.
10. Never push any objects through slots in the product. This may result in the risk of fire or electric shock. Never spill any liquid on the product.
11. To reduce the risk of electric shock, do not disassemble the product. Take the product to an authorized service centre when service is required. Opening or removing covers may expose you to dangerous voltages or other risks. Incorrect reassembly can cause electric shock when the product is subsequently used.
12. Unplug the product from power outlets and take to an authorized service centre when the following conditions occur:
  - A. When the power cord is damaged or frayed.
  - B. If liquid has been spilled into the product.
  - C. If the product has been exposed to rain or water.
  - D. If the product does not work normally by following the operating instructions. Adjust only controls covered by the operating instructions. Improper adjustment may require extensive work by an authorized service centre.
  - E. If the product has been dropped or physically damaged.
  - F. If the product exhibits a distinct change in performance.
13. During thunderstorms, avoid using telephones except cordless types. There may be a remote risk of an electric shock from lightning.
14. Do not use the product to report a gas leak, when in the vicinity of the leak.

**SAVE THESE  
INSTRUCTIONS**

## Introduction

### CAUTION:

#### Installation

- Never install telephone wiring during a lightning storm.
- Never install telephone jacks in wet locations unless the jack is specifically designed for wet locations.
- Never touch uninsulated telephone wires or terminals unless the telephone line has been disconnected at the network interface.
- Use caution when installing or modifying telephone lines.
- Do not touch the plug with wet hands.
- The AC adaptor is used as the main disconnect device. Ensure that the AC outlet is installed near the product and is easily accessible.

#### Battery

To reduce the risk of fire or injury to persons, read and follow these instructions.

- Use only the battery(ies) specified.
- Do not dispose of the battery(ies) in a fire. They may explode. Check with local waste management codes for special disposal instructions.
- Do not open or mutilate the battery(ies). Released electrolyte is corrosive and may cause burns or injury to the eyes or skin. The electrolyte may be toxic if swallowed.
- Exercise care when handling the battery(ies). Do not allow conductive materials such as rings, bracelets or keys to touch the battery(ies), otherwise a short circuit may cause the battery(ies) and/or the conductive material to overheat and cause burns.

- Charge the battery(ies) provided, or identified for use with the product only, in accordance with the instructions and limitations specified in this manual.

### WARNING:

- To prevent the risk of fire or electrical shock, do not expose the product to rain or any type of moisture.
- Unplug the product from power outlets if it emits smoke, an abnormal smell, or makes an unusual noise. These conditions can cause fire or electric shock. Confirm that smoke has stopped emitting and contact an authorized service centre.

#### Medical

- Consult the manufacturer of any personal medical devices, such as pacemakers or hearing aids, to determine if they are adequately shielded from external RF (radio frequency) energy. (The product operates in the frequency range of 5.76 GHz to 5.84 GHz, and the power output is 200 mW (max.)) Do not use the product in health care facilities if any regulations posted in the area instruct you not to do so. Hospitals or health care facilities may be using equipment that could be sensitive to external RF energy.

## Introduction

### For best performance

#### Base unit location/avoiding noise

The base unit and other compatible Panasonic units use radio waves to communicate with each other.

For maximum distance and noise-free operation, we recommend the following:

- Placing the product away from electrical appliances.
- Placing the base unit in a HIGH and CENTRAL location with no obstructions such as walls.
- Raising the antennas vertically.
- If you use the handset near a microwave oven which is being used, noise may be heard. Move away from the microwave oven and closer to the base unit.
- If you use the handset near another cordless phone's base unit, noise may be heard. Move away from the other cordless phone's base unit and closer to your base unit.

#### Environment

- Keep the product away from electrical noise generating devices, such as fluorescent lamps and motors.
- The product should be kept free from excessive smoke, dust, high temperature, and vibration.
- The product should not be exposed to direct sunlight.
- Do not place heavy objects on top of the product.
- When you leave the product unused for a long period of time, unplug the product from the power outlet.

- The product should be kept away from heat sources such as heaters, kitchen stoves, etc. It should not be placed in rooms where the temperature is less than 5 °C (41 °F) or greater than 40 °C (104 °F). Damp basements should also be avoided.
- The maximum calling distance may be shortened when the product is used in the following places: Near obstacles such as hills, tunnels, underground, near metal objects such as wire fences, etc.
- Operating the product near 5.8 GHz electrical appliances may cause interference. Move away from the electrical appliances.

#### Routine care

- Wipe the outer surface of the product with a soft moist cloth. Do not use benzine, thinner, or any abrasive powder.



**Preparation**

---

## Setting up the base unit

---

### Overview


- 1** Connect the AC adaptor.
- 2** Connect the telephone line cord.  
Refer to one of the following methods depending on your situation.
  - To connect to a 2-line telephone jack: page 10
  - To connect to 2 single-line telephone jacks: page 10
  - To connect to a single-line telephone jack: page 10
 For DSL service subscribers:
  - To connect to a 2-line telephone jack: page 11
  - To connect to 2 single-line telephone jacks: page 11

---

### Connecting the AC adaptor

Connect the AC adaptor, then raise the antennas.

- Use only the included Panasonic AC adaptor PQLV207.

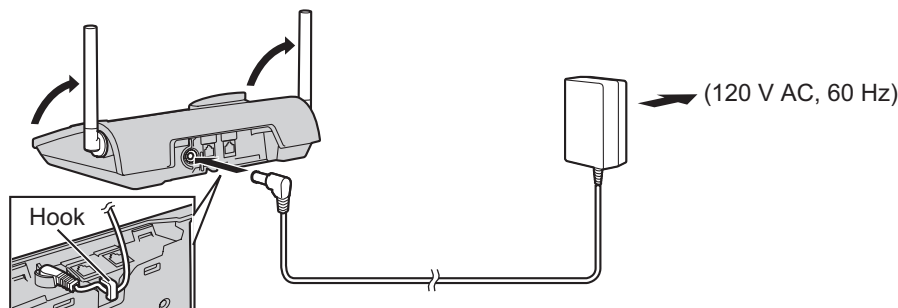

**Note:**


- The AC adaptor must remain connected at all times. (It is normal for the adaptor to feel warm during use.)
- The AC adaptor should be connected to a vertically oriented or floor-mounted AC outlet. Do not connect the AC adaptor to a ceiling-mounted AC outlet, as the weight of the adaptor may cause it to become disconnected.
- The unit will not work during a power failure. We recommend connecting a corded telephone to the same telephone line or to the same telephone jack using a T-adaptor.

## Preparation


### Connecting the telephone line cord

Connect the telephone line cord until it clicks into the telephone jack.


#### To connect to a 2-line telephone jack

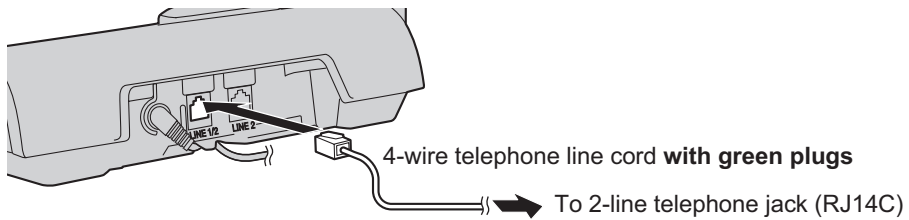

#### To connect to 2 single-line telephone jacks

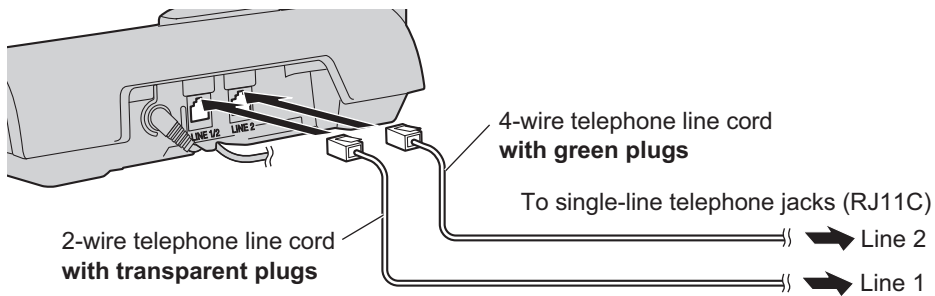

#### To connect to a single-line telephone jack

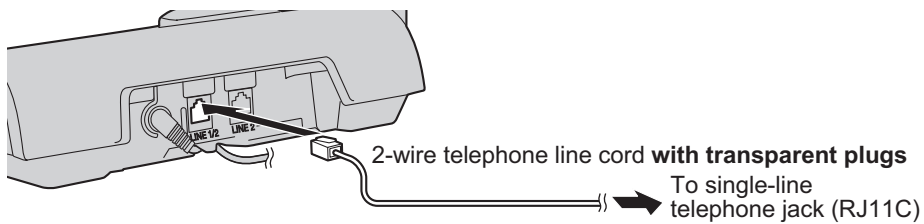

#### Note:

- Make sure you connect the telephone line cord into LINE1/2 telephone jack.

## Preparation

### If you subscribe to a DSL service


Please attach a noise filter (contact your DSL provider) to the telephone line between the base unit and the telephone line jack in the event of the following:

- Noise is heard during conversations.
- Call Display features (page 31) do not function properly.

### To connect to a 2-line telephone jack


For this connection, please use a 2-line splitter.

Example: DSL line is line 2

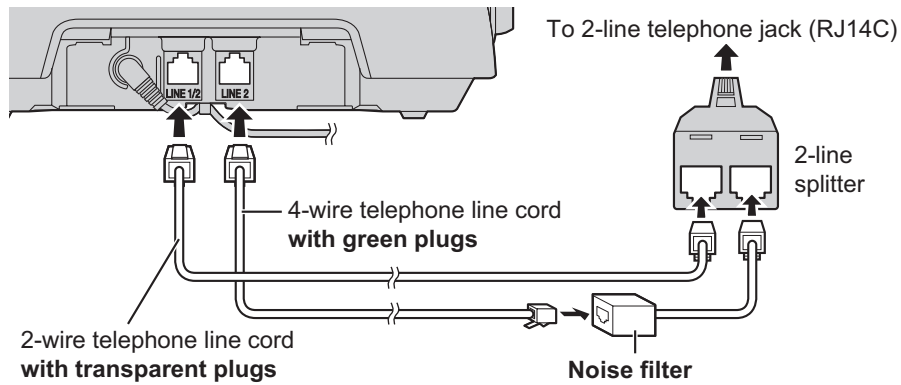

### To connect to 2 single-line telephone jacks

Example: DSL line is line 2

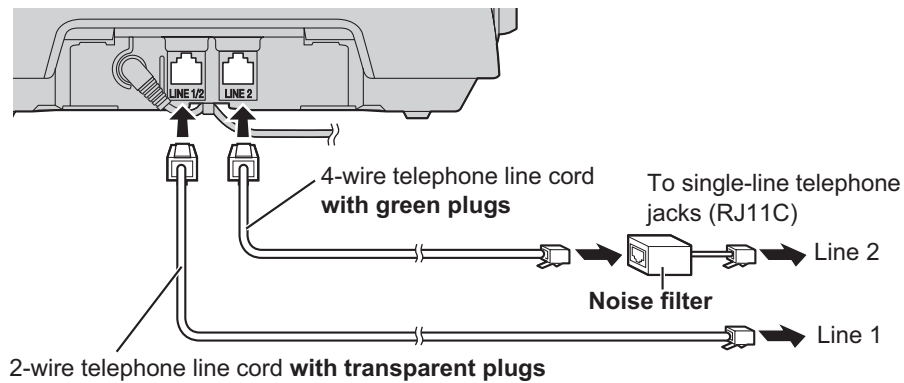


## Preparation

### Setting up the handset


#### Battery installation/replacement

- 1 Press the notch of the handset cover firmly, and slide it in the direction of the arrow.

- If necessary, remove the old battery.



- 2 Insert the battery (1), and press it down until it snaps into position (2). Then close the handset cover (3, 4).

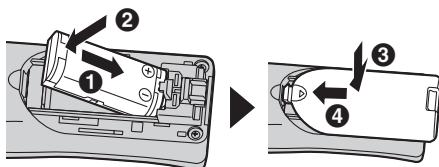

#### Important:

- Use only the rechargeable Panasonic battery noted on page 5.

#### Attention:




A nickel metal hydride battery that is recyclable powers the product you have purchased.

Please call 1-800-8-BATTERY (1-800-822-8837) for information on how to recycle this battery.

#### Battery charge

Place the handset on the base unit for **7 hours** before initial use.

While charging, the charge indicator on the handset lights in amber. When the battery is fully charged, "Charge completed" is displayed.

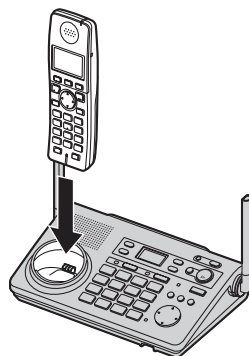





#### Note:

- If you want to use the handset immediately, charge the battery for at least 15 minutes.
- To ensure that the battery charges properly, clean the charge contacts of the handset and base unit with a soft, dry cloth once a month. Clean more often if the unit is subject to the exposure of grease, dust, or high humidity.

## Preparation

### Battery level

Battery icon	Battery level
	Fully charged
	Medium
	Low Flashing: needs to be recharged.
	Empty

#### Note:

- When the battery needs to be charged, the handset beeps intermittently during use.

### Panasonic battery performance

Operation	Operating time
While in use (talking)	Up to 5 hours
While not in use (standby)	Up to 7 days
While using the clarity booster feature (page 24)	Up to 3 hours

#### Note:

- Battery operating time may be shortened over time depending on usage conditions and surrounding temperature.
- Battery power is consumed whenever the handset is off the base unit, even when the handset is not in use. Hence the longer you leave the handset off the base unit, the less time you may actually talk using the handset.
- After the handset is fully charged, displaying "Charge completed", it


may be left on the base unit without any ill effect on the battery.

- The battery level may not be displayed correctly after you replace the battery. In this case, place the handset on the base unit and let it charge for 7 hours.

## Preparation

## Controls


### Base unit

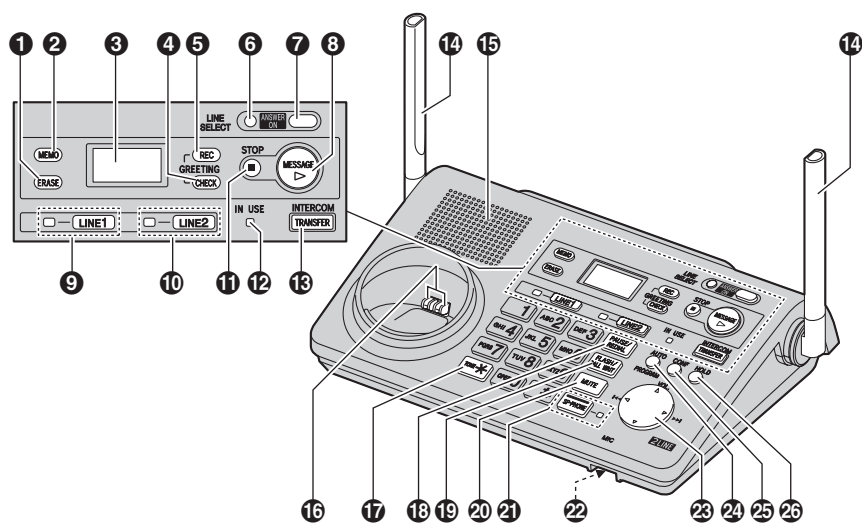

- |                                      |   |
|--------------------------------------|---|
| <b>1</b> [ERASE]                     | <b>14</b> Antenna   |
| <b>2</b> [MEMO]                      | <b>15</b> Speaker   |
| <b>3</b> Display                     | <b>16</b> Charge contacts                                 |
| <b>4</b> [GREETING CHECK]            | <b>17</b> [*] (TONE)                                      |
| <b>5</b> [GREETING REC] (Recording)  | <b>18</b> [PAUSE] [REDIAL]                                |
| <b>6</b> [LINE SELECT]               | <b>19</b> [FLASH] [CALL WAIT]                             |
| <b>7</b> [ANSWER ON]                 | <b>20</b> [MUTE]  |
| <b>8</b> [MESSAGE]                   | <b>21</b> [SP-PHONE] (Speakerphone)<br>SP-PHONE indicator |
| <b>9</b> [LINE1]<br>LINE1 indicator  | <b>22</b> MIC (Microphone)                                |
| <b>10</b> [LINE2]<br>LINE2 indicator | <b>23</b> Navigator key ([▲] [▼] [◀] [▶])                 |
| <b>11</b> [STOP]                     | <b>24</b> [AUTO] [PROGRAM]                                |
| <b>12</b> IN USE indicator           | <b>25</b> [CONF] (Conference)                             |
| <b>13</b> [TRANSFER] [INTERCOM]      | <b>26</b> [HOLD]  |

## Preparation

### Handset

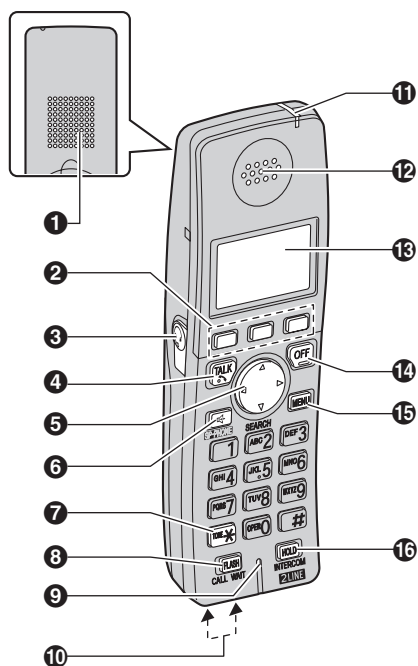


- 1 Speaker
- 2 Soft keys
- 3 Headset jack
- 4 [↶] (TALK)
- 5 Navigator key ([▲] [▼] [◀] [▶])/  
SEARCH ([▲] [▼])
- 6 [📞] (SP-PHONE)
- 7 [\*] (TONE)
- 8 [FLASH] [CALL WAIT]
- 9 Microphone
- 10 Charge contacts
- 11 Charge indicator  
Ringer indicator  
Message indicator

- 12 Receiver
- 13 Display
- 14 [OFF]
- 15 [MENU]
- 16 [HOLD] [INTERCOM]


#### Using the navigator key

The handset navigator key can be used to navigate through menus and to select items shown on the display, by pressing [▲], [▼], [◀], or [▶].



#### Handset soft keys

The handset features 3 soft keys. By pressing a soft key, you can select the function displayed directly above it.



## Preparation

### Displays

#### Base unit display items

Displayed item	Meaning
⓪	Flashes when the date and time need to be set.
<b>LINE 1</b> <b>LINE 2</b>	Indicates the selected line(s) for the answering system or ringer setting. Flashing: the answering system is answering a call or playing a message on the line.
<b>FULL</b>	Flashes when message memory is full.
L1 <del>⓪</del>	Indicates the line 1 ringer on the base unit is off.
L2 <del>⓪</del>	Indicates the line 2 ringer on the base unit is off.
E	Greeting or memo message recording error
G <sup>□</sup>	Answering system is in greeting only mode (caller message cannot be recorded). It is displayed when you turn the answering system on.
<b>Example:</b> H 1	Handset number: displayed when the base unit is on intercom call, monitoring, or monitored by a handset.
H	Paging all handsets
P	Base unit is in programming mode.

#### Handset display items

Displayed item	Meaning
<b>VE</b>	Voice enhancer is on.
▣▣▣	Battery level
<b>L1</b> <b>L2</b>	The line is in use. Flashing: – the call is put on hold on that line. – the answering system is answering a call on that line. Flashing rapidly: a call is being received on that line.
SP	Speaker is on.
PRIV.	Call privacy mode is on.
<b>Example:</b> 1	Handset's extension number.



**Preparation****Symbols used in these operating instructions**

Symbol	Meaning
<b>[ ]</b> : button name/soft key name <b>Example:</b> Unit keys: <b>[↶]</b> , <b>[OFF]</b> Soft keys: <b>[CID]</b> , <b>[☰]</b>	The words in the brackets indicate button names/soft key names on the handset and base unit.
→	Proceed to the next operation.
<b>Example:</b> "Ringer tone"	The words in quotations indicate the menu on the display.
<b>Example:</b> <b>1 [MENU] → [0][2]</b> <b>2</b> Select the desired setting. <b>3 [SAVE] → [OFF]</b>	<b>1</b> Press <b>[MENU]</b> , then press <b>[0]</b> , <b>[2]</b> . <b>2</b> Press <b>[▲]</b> or <b>[▼]</b> to select the desired setting. <b>3</b> Press <b>[SAVE]</b> , then press <b>[OFF]</b> .
<b>Handset:</b> <b>[▲] [▼] [◀] [▶]</b>	Press up, down, left, or right on the handset navigator key.
<b>Base unit:</b> <b>[▲] [▼] [◀◀] [▶▶]</b>	Press up, down, left, or right on the base unit navigator key.

## Preparation

### Setting the unit before use

#### Important:

- To program features by scrolling through the display menus, see page 34.

#### Display language

You can select either “English” or “Français” as the display language. The default setting is “English”.

##### Handset

- 1 [MENU] → [0][8][1]
- 2 Select the desired setting.
- 3 Press the middle soft key to save. → [OFF]

#### Voice guidance language (Voice prompt)

You can select either “English” or “Français” as the voice guidance language. The default setting is “English”.

##### Handset

- 1 [MENU] → [0][8][2]
- 2 Select the desired setting. → [SAVE] → [OFF]

#### Dialing mode

If you cannot make calls, change this setting according to your telephone line service. The default setting is “Tone”.  
“Tone”: For tone dial service.

“Pulse”: For rotary pulse dial service.

##### Handset

- 1 [MENU] → [0][5][1]
- 2 Select the desired setting. → [SAVE] → [OFF]

#### Date and time

Set the correct date and time. When you play back a message from the answering system (page 41), the unit announces the day and time it was recorded.

##### Handset

- 1 [MENU] → [4]
- 2 Enter the current month, day, and year by selecting 2 digits for each.  
**Example:** August 15, 2006  
[0][8] [1][5] [0][6]
- 3 Enter the current hour and minute (12-hour clock format) by selecting 2 digits for each.  
**Example:** 9:30  
[0][9] [3][0]
- 4 Press [AM/PM] to select “AM” or “PM”.  
→ [SAVE] → [OFF]

#### Note:

- When English is selected as the display language, 12-hour clock format is used. When French is selected, 24-hour clock format is used.
- If you make a mistake when entering the date and time, press [◀], [▶], [▲], or [▼] to move the cursor, then make the correction.

---

**Line selection**

The line selection mode determines which line is selected when you press **[↶]** on the handset or **[SP-PHONE]** on the base unit. The default setting is "Auto".

- "Auto": When making a call, line 1 is selected. If that line is unavailable, line 2 is selected. When answering a call, the ringing line is selected.
- "Line1": Line 1 is selected.
- "Line2": Line 2 is selected.

---

**Handset line selection****Handset**

**1** **[MENU]** → **[0][5][5]**

**2** Select the desired setting. → **[SAVE]**  
→ **[OFF]**

**Note:**

- You can select a line manually regardless of the line selection mode by pressing **[LINE1]** or **[LINE2]**.

---

**Base unit line selection****Handset**

**1** **[MENU]** → **[0][\*][5]**

**2** Select the desired setting. → **[SAVE]**  
→ **[OFF]**

**Note:**

- You can select a line manually regardless of the line selection mode by pressing **[LINE1]** or **[LINE2]**.

## Making/Answering Calls

### Making calls

While one line is in use, you can make or answer a call using the other line.

#### Using the handset

- 1 Lift the handset and dial the phone number.
  - To correct a digit, press **[CLEAR]**.
- 2 Press **[↶]**.
  - An available line is automatically selected and the line number is displayed.
- 3 When you finish talking, press **[OFF]** or place the handset on the base unit or charger.

#### Note:

- The IN USE indicator on the base unit lights while using the handset.
- You can also select a line by pressing **[LINE1]** or **[LINE2]** in step 2.
- To change the line selection, see page 19.

#### Using the speakerphone

- 1 Lift the handset, dial the phone number, and press **[☎]**.
  - Speak alternately with the other party.
- 2 When you finish talking, press **[OFF]**.

#### Note:

- Use the speakerphone in a quiet environment.
- To switch to the receiver, press **[↶]**.

#### Adjusting the receiver/speaker volume

Press **[▲]** or **[▼]** repeatedly while talking.

#### Making a call using the redial list

The last 5 phone numbers dialed are stored in the redial list.

- 1 **[REDIAL]**
- 2 Press **[▲]** or **[▼]** to select the desired number.
- 3 **[↶]**

#### Erasing a number in the redial list

- 1 **[REDIAL]**
- 2 Press **[▲]** or **[▼]** to select the desired number. → **[ERASE]**
- 3 **[YES]** → **[OFF]**

## Making/Answering Calls

### Using the base unit

#### 1 [SP-PHONE]

- An available line is automatically selected and LINE1 or LINE2 indicator lights.

#### 2 Dial the phone number.

#### 3 When the other party answers, speak into the MIC.

- Speak alternately with the other party.

#### 4 When you finish talking, press [SP-PHONE].

#### Note:

- You can also select a line by pressing [LINE1] or [LINE2] in step 1.
- Use the speakerphone in a quiet environment.
- While on a call, you can switch from the base unit to the handset:
  - Press [LINE1] or [LINE2] on the handset, then press [SP-PHONE] on the base unit.
  - If the handset is on the base unit, simply lift it.
- To change the line selection, see page 19.

#### Adjusting the speaker volume

Press [▲] or [▼] repeatedly while talking.

#### Redialing the last number dialed [SP-PHONE] → [REDIAL]

### Understanding the indicators



The LINE1 and LINE2 indicators show the status of each line as follows.

Status	Meaning
Light off	The line is free.
Light on	The line is in use.
Flashing rapidly	A call is being received.
Flashing	A call is put on hold or the answering system is answering a call.

## Making/Answering Calls

### Answering calls

#### Using the handset

**1** Lift the handset and press **[]** or **[]**.


- The called line is automatically selected.
- You can also answer the call by pressing any button except navigator key or **[OFF]**. (**Any key talk feature**)

**2** When you finish talking, press **[OFF]**.

#### Note:

- You can also answer the call by pressing **[LINE1]** or **[LINE2]** in step 1.
- To change the line selection, see page 19.

#### Auto talk

This feature allows you to answer a call by simply lifting the handset off the base unit or charger. You do not need to press **[]**. To activate this feature, see page 36.

#### Temporary ringer off

While the handset is ringing for a call, you can turn the ringer off temporarily by pressing **[OFF]**.

### Using the base unit

**1 [SP-PHONE]**

- The called line is automatically selected.

**2** Speak into the MIC.

**3** When you finish talking, press **[SP-PHONE]**.

#### Note:

- You can also answer the call by pressing **[LINE1]** or **[LINE2]** in step 1.
- To change the line selection, see page 19.

### Adjusting the ringer volume

**1** Press **[LINE SELECT]** repeatedly to select the desired line when in standby mode.

- You cannot set the ringer volume for both lines at the same time.

**2** Press **[▲]** or **[▼]** repeatedly to select the desired volume.

- To turn the ringer off, press and hold **[▼]** until the unit beeps.
- To stop ringing, press **[STOP]**.

## Making/Answering Calls

### Changing the ringer tone

You can change the base unit ringer tone heard when an outside call is received. There are 4 tones and 4 melodies.

- 1 Press **[LINE SELECT]** repeatedly to select the desired line when in standby mode.
  - You cannot set the ringer tone for both lines at the same time.
- 2 Within 10 seconds, press **[◀◀]** or **[▶▶]** repeatedly to select the desired ringer tone.
  - To stop ringing, press **[STOP]**.

#### Note:

- If you subscribe to a distinctive ring service, select a tone (Tone 1 to 4). If you select a melody, you cannot distinguish lines by their ringers.
- If you select one of the melody ringer patterns, the ringer continues to sound for several seconds if:
  - the caller hangs up before you answer the call.
  - another person answers the call using another phone connected on the same line.

### Useful features during a call

#### HOLD button

This feature allows you to put an outside call on hold.

#### Handset

- 1 Press **[HOLD]** during an outside call.
  - To transfer the call to the base unit or another handset, continue from step 2, "Transferring calls", page 50.
- 2 Press **[HOLD]** again.
  - To release the hold, press **[LINE1]** or **[LINE2]** that is flashing on the handset.

#### Base unit

Press **[HOLD]** during an outside call.

- To release the hold, press **[LINE1]** or **[LINE2]** that is flashing on the base unit.

#### Note for handset and base unit:

- If another phone is connected to the same line (page 10), you can also take the call by lifting its handset.
- If a call is kept on hold for more than 6 minutes, an alarm tone starts to sound. After 4 additional minutes on hold, the call is disconnected.

## Making/Answering Calls

### MUTE

While mute is turned on, you can hear the other party, but the other party cannot hear you.

#### Handset

To mute your voice, press **[MUTE]**.

- To return to the conversation, press **[MUTE]** or **[↶]**.

#### Note:

- **[MUTE]** is a soft key visible on the handset display during a call.

#### Base unit

To mute your voice, press **[MUTE]**.

- To return to the conversation, press **[MUTE]** or **[SP-PHONE]**.

### FLASH button

Pressing **[FLASH]** allows you to use special features of your host PBX such as transferring an extension call, or accessing optional telephone services such as Call Waiting.

#### Note:

- To change the flash time, see page 38.

### For Call Waiting service users

To use Call Waiting, you must subscribe to Call Waiting service of your telephone service provider.

This feature allows you to receive calls while you are already talking on the phone. If you receive a call while on the phone, you will hear a Call Waiting tone.

Press **[CALL WAIT]** to answer the 2nd call after the tone.

- To switch between calls, press **[CALL WAIT]**.

#### Note:

- Please contact your telephone service provider for details and availability of this service in your area.

### Temporary tone dialing (for rotary/pulse service users)

You can temporarily switch the dialing mode to tone when you need to access touch tone services (for example, answering services, telephone banking services, etc.).

Press **[\*]** (TONE) before entering access numbers which require tone dialing.

### Handset clarity booster

This feature can improve sound clarity when the handset is used in an area where there may be interference. During an outside call, this feature is turned on automatically when necessary. You can also turn this feature on or off manually.

- 1 Press **[MENU]** during an outside call.
- 2 Press **[3]** to select "Booster on" or "Booster off".

#### Note:

- When this feature is turned off manually during a call, it does not turn on automatically during the same call.
- While this feature is turned on;
  - the battery operating time is shortened (page 13).
  - the maximum number of extensions that can be used at a time may decrease.



## Making/Answering Calls

### Handset voice enhancer

This feature clarifies the voice of the person you are talking to, reproducing a more natural-sounding voice that is easier to hear and understand.

To turn on or off this feature, press **[(VE)]** during an outside call.

- When this feature is turned on, **VE** is displayed.

#### Note:

- Depending on the condition and quality of your telephone line, this feature may emphasize existing line noise. If it becomes difficult to hear, turn this feature off.
- While you are using both lines simultaneously, **[(VE)]** is not displayed. Use the following procedure to turn this feature on or off.  
Press **[MENU]** during a conversation, then press **[4]** to select "v.e. on" or "v.e. off".

### Call share

This feature allows the handset and base unit to join an existing outside call.

#### Handset

To join the conversation, press **[LINE1]** or **[LINE2]** to select the line that is being used by another extension for an outside call.

#### Base unit

To join the conversation, press **[LINE1]** or **[LINE2]** to select the line that is being used by another extension for an outside call.

### Note for handset and base unit:

- A maximum of 4 parties (including 1 or 2 outside parties) can join a conversation.

### Call privacy

Call privacy allows you to prevent other users from joining your conversations with outside callers. To allow other users to join your conversations, leave this feature off.

#### Handset

- 1 Press **[MENU]** during an outside call.
- 2 Press **[2]** to select "Privacy on" or "Privacy off".
  - When this feature is turned on, "PRIV." is displayed.

#### Note:

- This feature will turn off after you hang up the call.

## Making/Answering Calls

### Using the other line during a call

When a call is being received on the other line during a conversation, the interrupt tones sound (page 36). **L1** or **L2** on the handset, or LINE1 or LINE2 indicator on the base unit flashes rapidly. You can answer the 2nd call while holding the 1st call.

You can also make a call without ending the 1st call.

#### Handset

Example: If you are using line 1

- 1 Press **[HOLD]** 2 times to put the 1st call (line 1) on hold.
- 2 Press **[LINE2]** to make or answer a 2nd call.
  - To hold the 2nd call, press **[HOLD]** 2 times.
- 3 To return to the 1st call (line 1), press **[LINE1]**.

#### Note:

- If you subscribe to Call Display, the 2nd caller's information is displayed when a call is being received on the other line (page 31).

#### Base unit

Example: If you are using line 1

- 1 Press **[HOLD]** to put the 1st call (line 1) on hold.

- 2 Press **[LINE2]** to make or answer a 2nd call.
  - To hold the 2nd call, press **[HOLD]**.
- 3 To return to the 1st call (line 1), press **[LINE1]**.

## Handset phonebook

You can add up to 50 items to the handset phonebook and search for phonebook items by name.

### Adding items to the handset phonebook

**1** [▲] or [▼] → [📖]

**2** [ADD]

**3** Enter the name (max. 16 characters).  
→ [NEXT]

**4** Enter the phone number (max. 32 digits). → [NEXT]

**5** [SAVE]

- To add other items, repeat from step 2.

**6** [OFF]

### PAUSE button (for PBX/long distance service users)

A pause is sometimes required when making calls using a PBX or long distance service. When storing a calling card access number and/or PIN in the phonebook, a pause is also needed (page 29).

For example, if you need to dial the line access number "9" when making outside calls with a PBX:

In step 4, press [9], [PAUSE], then enter the phone number.

#### Note:

- A 3.5 second pause is inserted each time [PAUSE] is pressed. Press repeatedly to insert longer pauses.

#### Character table for entering names

Key	Character
[1]	& ' ( ) , - . / 1
[2]	a b c A B C 2
[3]	d e f D E F 3
[4]	g h i G H I 4
[5]	j k l J K L 5
[6]	m n o M N O 6
[7]	p q r s P Q R S 7
[8]	t u v T U V 8
[9]	w x y z W X Y Z 9
[0]	0 Space
[#]	#
[*]	*

#### Note:

- To enter another character that is located on the same dial key, first press [▶] to move the cursor to the next space.

#### Editing/correcting a mistake

Press [◀] or [▶] to move the cursor to the character or number you want to erase, then press [CLEAR]. Enter the appropriate character or number.

#### Note:

- Press and hold [CLEAR] to erase all characters or numbers.

## Phonebook

### Finding and calling a handset phonebook item

Phonebook items can be searched for alphabetically by scrolling through the phonebook items or by initial.

Once you have found the desired item, press **[↵]** to dial the number.

- You can also make a call by pressing **[CALL]**, then pressing **[LINE1]** or **[LINE2]**.

### Searching for a name alphabetically by scrolling through all items

- 1 **[▲]** or **[▼]** → **[☰]**
- 2 Press **[▲]** or **[▼]** to select the desired item.

### Searching for a name by initial

- 1 **[▲]** or **[▼]** → **[☰]**
- 2 Press the dial key (**[0]** – **[9]**, **[#]**, or **[\*]**) that corresponds to the first letter you are searching for (see the character table, page 27).

#### Example: "LISA"

Press **[5]** repeatedly to display the first phonebook entry starting with the initial "L" and go to step 3.

- If there is no item corresponding to the letter you selected, the next item is displayed.

- 3 Press **[▼]** to select the desired item.

### Editing items in the handset phonebook

- 1 Find the desired item (page 28). → **[EDIT]**
- 2 Edit the name if necessary (page 27). → **[NEXT]**
- 3 Edit the phone number if necessary. → **[NEXT]** → **[SAVE]** → **[OFF]**

### Erasing an item in the handset phonebook

- 1 Find the desired item (page 28).
- 2 **[ERASE]** → **[YES]** → **[OFF]**

## Phonebook

### Chain dial

This feature allows you to dial phone numbers in the handset phonebook while you are on a call. This feature can be used, for example, to dial a calling card access number or bank account PIN that you have stored in the handset phonebook, without having to dial manually.

- 1 Press **[MENU]** during an outside call.
- 2 Press **[1]** to select "Phonebook".
- 3 Find the desired item (page 28). → **[CALL]**

#### Note:

- When storing a calling card access number and your PIN in the phonebook as one phonebook item, press **[PAUSE]** to add pauses after the number and PIN as necessary (page 27).
- If you have rotary or pulse service, you need to press **[\*]** before pressing **[MENU]** in step 1 to change the dialing mode temporarily to tone.

### Copying handset phonebook items

You can copy one or all of the phonebook items from the handset to the phonebook of a compatible Panasonic handset (KX-TGA670C).

#### Copying an item

- 1 **[MENU]** → **[#][1]**
- 2 Select the handset to copy to. → **[NEXT]**
- 3 Press **[▲]** or **[▼]** to select the desired item. → **[SEND]**
  - To continue copying another item, repeat from step 3.
- 4 Press **[OFF]** after the long beep.

#### Copying all items

- 1 **[MENU]** → **[#][2]**
- 2 Select the handset to copy to. → **[SEND]**
- 3 Press **[OFF]** after the long beep.

## Base Unit Speed Dialer

### Base unit speed dialer

You can assign one phone number to each of the 10 dial keys ([0] – [9]) on the base unit.

### Adding phone numbers to the speed dialer

#### Important:

- Before adding phone numbers, make sure the base unit is not being used.

#### 1 [PROGRAM]

2 Enter the phone number (max. 32 digits).

- If a pause is required for dialing, press [PAUSE] where needed.
- If you misdial, press [STOP] and repeat from step 1.

#### 3 [PROGRAM]

4 Press a dial key ([0] – [9]).

#### Note:

- If a phone number is assigned to a dial key which already contains a phone number, the old number will be erased.
- We recommend you make a note of which phone numbers are stored in which dial keys.

### PAUSE button (for PBX/long distance service users)

A pause is sometimes required when making calls using a PBX or long distance service.

For example, if you need to dial the line access number "9" when making outside calls with a PBX:

In step 2, press [9], [PAUSE], then enter the phone number.

#### Note:

- A 3.5 second pause is inserted each time [PAUSE] is pressed. Press repeatedly to insert longer pauses. "P" is displayed when [PAUSE] is pressed.
- When [\*] is pressed, "L" is displayed. When [#] is pressed, "E" is displayed.

### To erase a stored phone number

1 Press [PROGRAM] 2 times.

2 Press the desired dial key ([0] – [9]).

### Calling someone with the speed dialer

1 [SP-PHONE] → [AUTO]

2 Press the desired dial key ([0] – [9]).

#### Note:

- Speed dial numbers assigned to the base unit dial keys can only be dialed from the base unit.

## Call Display Service

### Using Call Display service

This unit is Call Display compatible. To use Call Display features, you must subscribe to Call Display service of your telephone service provider.

#### Call Display features

When an outside call is being received, the calling party's name and telephone number are displayed.

Caller information for the last 50 different callers is logged in the caller list by the most recent call to the oldest.

- Generally caller information is displayed from the 2nd ring.
- If the unit cannot receive caller information, the following is displayed:
  - “**Unavailable Name & No.**”: The caller dialed from an area which does not provide Call Display service.
  - “**Private caller**”: The caller requested not to send caller information.
  - “**Long distance**”: The caller called you long distance.
- If the unit is connected to a PBX system, caller information may not be received properly. Consult your PBX supplier.

#### Missed calls

If a call is not answered, the unit treats the call as a missed call. The number of missed calls is shown on the handset display. This lets you know if you should view the caller list to see who called while you were out.

#### Private name display

When caller information is received and it matches a phone number stored in the phonebook, the stored name is displayed and logged in the caller list.

#### Visual Call Waiting service

If you subscribe to both Call Display and Visual Call Waiting services, the 2nd caller's information is displayed after you hear a Call Waiting tone (page 24).

Please contact your telephone company for details and availability of this service in your area.

## Call Display Service

### Caller list

#### Viewing the caller list and calling back

- 1 **[▲]** or **[▼]** → **[CID]**
- 2 Press **[▼]** to search from the most recent call, or **[▲]** to search from the oldest call.
- 3 **[↶]**

**Note:**

- If the indicated line is already being used or you want to select the other line, press **[CALL]** in step 3 then select the desired line by pressing **[LINE1]** or **[LINE2]**.

#### Displayed symbols

- **1** and **2** indicate which line the caller information was received from.
- If the same caller calls more than once, it is displayed with the number of times the caller called (“x2” to “x9”). Only the date and time of the most recent call is stored.
- A **✓** is displayed next to items which have already been viewed or answered.

### Editing a caller's phone number before calling back

You can edit a phone number in the caller list by adding the long distance code “1” or removing its area code.

- 1 **[▲]** or **[▼]** → **[CID]**
- 2 Select the desired item. → **[CALL]**
- 3 Press **[EDIT]** repeatedly until the phone number is shown in the desired format.
  - ① 1 – Area code – Local phone number  
**Example:**
  - ② Local phone number  
**Example:**
  - ③ Area code – Local phone number  
**Example:**

#### 4 **[↶]**

**Note:**

- The number edited in step 3 is not saved in the caller list.



## Call Display Service

---

### Storing caller information into the handset phonebook

- 1** [▲] or [▼] → [CID]
- 2** Select the desired item. → [SAVE]
  - To edit the number, press [EDIT] repeatedly until the phone number is shown in the desired format.
- 3** [SAVE]
  - If there is the name information for the caller, skip to step 5.
- 4** Enter the name (see the character table, page 27). → [NEXT] → [SAVE]
- 5** [OFF]

---

### Erasing selected caller information

- 1** [▲] or [▼] → [CID]
- 2** Select the desired item.
- 3** [ERASE] → [YES] → [OFF]

---

### Erasing all caller information

- 1** [▲] or [▼] → [CID]
- 2** [ERASE] → [YES]

## Programming

### Programmable settings

You can customize the unit by programming the following features using the handset. To access the features, there are 2 methods:

- scrolling through the display menus (page 34)
- using the direct commands (page 36)
- The direct command method is mainly used in these operating instructions.

#### Programming by scrolling through the display menus

##### 1 [MENU]

2 Press [▲] or [▼] to select the desired menu. → [SELECT]

- If there are sub-menu(s), press [▲] or [▼] to select the desired item. → [SELECT]

**Example:** To access the handset ringer volume setting

Press [▲] or [▼] to select "Ringer setting". → [SELECT]

Then press [▲] or [▼] to select "Ringer volume". → [SELECT]

3 Press [▲] or [▼] to select desired line.

- This step may not be necessary depending on the feature being programmed.

4 Press [▲] or [▼] to select the desired setting.

- This step may vary depending on the feature being programmed.

##### 5 [SAVE] → [OFF]

Main menu	Sub-menu 1	Sub-menu 2	Page
Message playback	–	–	41, 42
Phonebook	–	–	27
Ringer setting	Ringer volume	–	–
	Ringer tone	–	–
	Interrupt tone	–	–
Date and time <sup>*1</sup>	–	–	18
Voice enhancer	–	–	25
Copy phonebook	Copy 1 item	–	29
	Copy all items	–	29

## Programming

Main menu	Sub-menu 1	Sub-menu 2	Page
Initial setting	Set answering	Ring count <sup>*1</sup>	46
		Recording time <sup>*1</sup>	47
		Remote code <sup>*1</sup>	47
		Recording mode <sup>*1</sup>	47
	Message alert	–	48
	LCD contrast	–	–
	Key tone	–	–
	Auto talk	–	22
	Room monitor	–	53
	Set tel line	Line select	19
		Set dial mode <sup>*1</sup>	18
		Set flash time <sup>*1</sup>	–
		Set line mode <sup>*1</sup>	–
	Set base unit	Ringer volume <sup>*1</sup>	–
		Ringer tone <sup>*1</sup>	–
		Interrupt tone <sup>*1</sup>	–
		Room monitor <sup>*1</sup>	53
		Line select <sup>*1</sup>	19
	Registration	HS registration	54
		Deregistration	54
	Change language	Display	18
		Voice prompt <sup>*1</sup>	18

\*1 If you program these settings using one of the handsets, you do not need to program the same item using another handset.

## Programming

### Programming using the direct commands

#### 1 [MENU]

2 Enter the desired feature code.

3 Enter the desired setting code.

- This step may vary depending on the feature being programmed.

#### 4 [SAVE] → [OFF]

##### Note:

- In the following table, < > indicates the default setting.
- If you make a mistake or enter the wrong code, press **[OFF]**, then start again from step 1.

Feature	Feature code	Setting code	Page
Auto talk <sup>*1*2</sup>	[0][3]	[1]: On [0]: <Off>	22
Copy phonebook (Copy 1 item)	[#][1]	–	29
Copy phonebook (Copy all items)	[#][2]	–	29
Date and time <sup>*3</sup>	[4]	–	18
Deregistration	[0][0][2]	–	54
Display (Display language)	[0][8][1]	[1]: <English> [2]: Français	18
HS registration (Handset registration)	[0][0][1]	–	54
Interrupt tone <sup>*4</sup> (Handset)	[1][3]	[1]: On [2]: <2> [0]: Off	–
Interrupt tone <sup>*3*4</sup> (Base unit)	[0][*][2]		–
Key tone <sup>*5</sup>	[0][2]	[1]: <On> [0]: Off	–
LCD contrast (Display contrast)	[0][1]	[1]–[6]: Level 1–6 <3>	–

## Programming

Feature	Feature code	Setting code	Page
Line select (Handset)	[0][5][5]	[1]: Line1 [2]: Line2 [0]: <Auto>	19
Line select <sup>*3</sup> (Base unit)	[0][*][5]		19
Message alert	[0][††]	[1]: On [0]: <Off>	48
Message playback	[2]	–	41, 42
Phonebook	[*]	–	27
Recording mode <sup>*3</sup>	[0][6][4]	[1]: <Standard recording 60min> [2]: Enhanced recording 30min	47
Recording time <sup>*3</sup>	Line1	[0][6][2][1]	[1]: 1min [2]: 2min [3]: <3min> [0]: Greeting only
	Line2	[0][6][2][2]	
Remote code <sup>*3</sup>	[0][6][3]	Default: 11	47
Ring count <sup>*3</sup>	Line1	[0][6][1][1]	[2]–[7]: 2–7 rings <4> [0]: Toll saver
	Line2	[0][6][1][2]	
Ringer tone <sup>*6</sup> (Handset)	Line1	[1][2][1]	[1]–[4]: Tone 1–4 [5]–[8]: Melody 1–4 Line 1: <Tone 1> Line 2: <Tone 2>
	Line2	[1][2][2]	
Ringer tone <sup>*3*6</sup> (Base unit)	Line1	[0][*][1][1]	–
	Line2	[0][*][1][2]	
Ringer volume (Handset)	Line1	[1][1][1]	[1]–[3]: Level 1–3 <3> [0]: Off
	Line2	[1][1][2]	
Ringer volume <sup>*3</sup> (Base unit)	Line1	[0][*][6][1]	–
	Line2	[0][*][6][2]	
Room monitor (Handset)	[0][9]	[1]: On [0]: <Off>	53
Room monitor <sup>*3</sup> (Base unit)	[0][*][3]		53
Set dial mode <sup>*3</sup>	[0][5][1]	[1]: Pulse [2]: <Tone>	18

## Programming

Feature		Feature code	Setting code	Page
Set flash time <sup>*3*7</sup>	Line1	[0][5][2][1]	[1]: <700ms>	-
	Line2	[0][5][2][2]	[2]: 600ms [3]: 400ms [4]: 300ms [5]: 250ms [6]: 110ms [7]: 100ms [8]: 90ms	
Set line mode <sup>*3*8</sup>	Line1	[0][5][3][1]	[1]: A [2]: <B>	-
	Line2	[0][5][3][2]		
Voice enhancer		[5]	[1]: On [0]: <Off>	25
Voice prompt <sup>*3</sup> (Voice guidance language)		[0][8][2]	[1]: <English> [2]: Français	18

- \*1 If you set the line selection mode from "Auto" to "Line1" or "Line2" (page 19), the auto talk feature will function for that line only. If the other line receives a call, the auto talk feature does not function.
- \*2 If you subscribe to Call Display service and want to view the caller's information after lifting up the handset to answer a call, turn off this feature.
- \*3 If you program these settings using one of the handsets, you do not need to program the same item using another handset.
- \*4 This tone lets you know when you receive a call while you are on the other line, on an intercom call, or monitoring a room. If you select "on", the tone sounds repeatedly for as long as the line rings. If you select "2", the tone only sounds 2 times.
- \*5 Turn this feature off if you prefer not to hear key tones while you are dialing or pressing any keys, including confirmation tones and error tones.
- \*6 If you subscribe to a distinctive ring service, select a tone (tone 1 to 4). If you select a melody, you cannot distinguish lines by their ringers.  
If you select one of the melody ringer patterns, the ringer continues to sound for several seconds if:
- the caller hangs up before you answer the call.
  - another person answers the call using another phone connected on the same line.
- \*7 The flash time depends on your telephone exchange or host PBX. Consult your PBX supplier if necessary.
- \*8 Generally, the line mode setting should not be adjusted. If **L1** or **L2** is not displayed on the handset or the LINE1 or LINE2 indicator on the base unit does not light properly when another phone connected to the same line is in use, you need to change the line mode to "A".

## Answering System

### Answering system

#### Important:

- Only 1 person can access the answering system at a time.
- When callers leave messages, the unit records the day and time of each message. Make sure the date and time have been correctly set (page 18).

### Memory capacity

The total recording capacity (including your greeting message, caller messages, and voice memos) is about 60 minutes. A maximum of 99 messages can be recorded.

- If the message memory becomes full, the **[ANSWER ON]** button on the base unit flashes rapidly. Erase unnecessary messages (page 41).
- If less than 10 minutes of recording time is available, the unit announces the remaining recording time when operating the answering system. Erase unnecessary messages (page 41).

### Turning the answering system on

#### Base unit

Press **[LINE SELECT]** repeatedly to select the desired line(s). → **[ANSWER ON]**

- The **[ANSWER ON]** button lights.

### Turning the answering system off

#### Base unit

Press **[ANSWER ON]**.

- The **[ANSWER ON]** button turns off.

### Screening calls

While a caller is leaving a message, you can listen to the call through the base unit speakers. To adjust the speaker volume, press **[▲]** or **[▼]** repeatedly.

To answer the call, press **[LINE1]** or **[LINE2]** being called on the base unit or **[LINE1]** or **[LINE2]** being called on the handset.

### Turning off the call screening feature

When the base unit is not in use, press **[GREETING CHECK]**, then press **[▼]** repeatedly until "0" is displayed.

OR

While screening, press **[▼]** repeatedly until "0" is displayed.

#### Note:

- If you adjust the speaker volume while listening to messages or talking on the intercom, the speaker volume for call screening is turned on again.

## Answering System

### Recording your greeting message

You can record your own greeting message (max. 2 minutes) that is played when the answering system answers a call.

The greeting messages can be recorded:

- for each line.
  - for both lines using a common greeting.
- If you do not record a greeting message, a prerecorded greeting message is used.

#### Base unit

- 1** Press **[LINE SELECT]** repeatedly to select the desired line(s).
- 2 [GREETING REC]**
- 3** Within 10 seconds, press **[GREETING REC]** again.
- 4** After the base unit beeps, speak clearly about 20 cm (8 inches) away from the MIC.
- 5** To stop recording, press **[STOP]**.

### Playing back the greeting message

- 1** Press **[LINE SELECT]** repeatedly to select the desired line(s).
- 2 [GREETING CHECK].**

### Erasing your greeting message

- 1** Press **[LINE SELECT]** repeatedly to select the desired line(s).
- 2** Press **[GREETING CHECK]**, and then press **[ERASE]** while your greeting message is playing.

### Prerecorded greeting message

If you erase or do not record your own greeting message, the unit plays a prerecorded greeting message for callers and ask them to leave messages. If the message recording time (page 47) is set to “**Greeting only**”, caller messages are not recorded and the unit plays a different prerecorded greeting message asking callers to call again.

#### Base unit

To play back the prerecorded greeting message.

Press **[LINE SELECT]** repeatedly to select the desired line(s). → **[GREETING CHECK]**

#### Note:

- If you changed the caller’s recording time to “**Greeting only**” to listen to its prerecorded message, remember to reset your original setting (page 47).



## Answering System

### Listening to messages using the base unit

The base unit plays messages, including memo messages, on the line selected for the answering system. In standby mode, the selected line is indicated by **■** or **■** on the base unit.

When only one line is active for recording incoming messages and you wish to play back messages on the other line, you must first press **[LINE SELECT]** to select the line for playback. See "Playing back messages for the desired line(s)".

When new messages have been recorded, the **[MESSAGE]** button on the base unit flashes.

Press **[MESSAGE]**.

- When you have new messages, the unit plays only new messages.
- When you have no new messages, the unit plays back all messages.

### Playing back messages for the desired line(s)

Press **[LINE SELECT]** repeatedly to select the desired line(s), then press **[MESSAGE]**.

#### Note:

- After selecting the line(s), memo messages do not play.

### Adjusting the speaker volume

Press **[▲]** or **[▼]** repeatedly while listening to a message.

### Repeating a message

Press **[◀◀]** during playback.

- If pressed within the first 5 seconds of a message, the previous message is played.

### Skipping a message

Press **[▶▶]** during playback.

### Pausing a message

Press **[STOP]** during playback.

- To resume playback, press **[MESSAGE]**.
- To stop playback completely, press **[STOP]** again.

### Erasing a message

Press **[ERASE]** during playback.

### Erasing all messages

Press **[ERASE]** 2 times while the unit is not being used.

- All messages including memo messages are erased.

### Erasing all messages for the desired line(s)

- 1 Press **[LINE SELECT]** repeatedly to select the desired line(s).
  - The number of the messages on the selected line(s) is displayed and the messages on the line(s) will be erased in step 3.
- 2 Press **[ERASE]**.
  - The base unit displays the number of all messages on the both lines and memo messages regardless of the selected line(s).
- 3 Press **[ERASE]** again.

## Answering System

- The messages on the selected line(s) in step 1 are erased.

### Listening to messages using the handset

When new messages have been recorded:

- “**New message**” is displayed.
- the message indicator on the handset slowly flashes in amber if the message alert feature is turned on (page 48).

#### 1 [▲] or [▼] → [PLAY]

- The handset plays new messages including memo messages.
- When you have no new messages, the handset plays back all messages.

#### 2 When finished, press [OFF].

#### Note:

- To switch to the receiver, press [↶].

#### Adjusting the receiver/speaker volume

Press [▲] or [▼] repeatedly while listening to a message.

#### Voice guidance

If you do not press any buttons after the last message is played back, the unit's voice guidance starts. Operate the answering system by following the guidance as necessary.

#### Calling back (Call Display subscribers only)

If caller information was received for the call, you can call the caller back while listening to the message.

#### 1 Press [CALL] during playback.

## Answering System

- To edit the number before calling back, press **[EDIT]** repeatedly to select the desired format (page 32).

### 2 [↶]

- If the indicated line is already being used or you want to select the other line, select the desired line by pressing **[LINE1]** or **[LINE2]** instead of [↶].

### Answering system commands

You can also select the desired line(s) and press dial keys to access certain answering system functions using the handset during playback.

#### 1 [MENU] → [2]

#### 2 Select the desired line(s) if necessary.

For line 1: **[#][1]**

For line 2: **[#][2]**

For line 1 and line 2: **[#][0]**

- After selecting the line(s), memo messages do not play.

#### 3 Press the desired dial keys.

Key	Command
<b>[1]</b> or <b>[◀]</b>	Repeat message (during playback). <sup>*1</sup>
<b>[2]</b> or <b>[▶]</b>	Skip message (during playback).
<b>[4]</b>	Play new messages.
<b>[5]</b>	Play all messages.
<b>[9]</b>	Stop playback. <sup>*2</sup>
<b>[0]</b>	Turn answering system off.
<b>[*][4]</b> or <b>[ERASE]</b>	Erase currently playing message.

Key	Command
<b>[*][5]</b>	Erase all messages.
<b>[#][1][8]</b>	Turn answering system on for line 1 only.
<b>[#][2][8]</b>	Turn answering system on for line 2 only.
<b>[#][0][8]</b>	Turn answering system on for both line 1 and line 2.

\*1 If pressed within the first 5 seconds of a message, the previous message is played.

\*2 To resume operation, press a command key within 15 seconds, or the voice guidance starts.

## Answering System

### Voice memo

#### Recording a voice memo

You can use the base unit to leave a voice memo (voice message) for yourself or someone else (max. 3 minutes). Voice memos can be played back later with the same operation used to play back answering system messages.

#### Base unit

- 1 [MEMO]**
- 2** After the unit beeps, speak clearly about 20 cm (8 inches) away from the MIC.
- 3** To stop recording, press **[STOP]**.

### Remote operation

Using a touch tone phone, you can call your phone number from outside and access the unit to listen to messages. The unit's voice guidance prompts you to press certain dial keys to perform different operations.

#### Important:

- In order to operate the answering system remotely, you must first set a remote code (page 47). This code must be entered each time you operate the answering system remotely.

#### Using the answering system remotely

- 1** Dial your phone number from a touch tone phone.
- 2** After the greeting message starts, enter your remote code (page 47).
  - The unit plays back new messages including memo messages.
  - After playing back new messages, the voice guidance starts.
- 3** Follow the voice guidance as necessary.
- 4** When finished, hang up.

#### Note:

- You can ignore the voice guidance and control the unit using remote commands (page 45).

## Answering System

### Voice guidance

During remote operation, the unit's voice guidance prompts you to press **[1]** to perform a specific operation, or press **[2]** to listen to more available operations. Operations are presented by voice guidance in the following order:

- Play back all messages
- Play back new messages
- Record your message
- Erase all messages
- Record your greeting message

### Note:

- If you do not press any dial keys within 10 seconds after a voice guidance prompt, the unit disconnects your call.
- If less than 10 minutes of recording time is available, the unit announces the remaining recording time after the last message is played back.

### Remote commands

You can select the desired line(s) and press dial keys to access certain answering system functions without waiting for the voice guidance to prompt you.

- 1** Select the desired line(s) while you are accessing the answering system if necessary.

For line 1: **[#][1]**

For line 2: **[#][2]**

For line 1 and line 2: **[#][0]**

- After selecting the line(s), memo messages do not play.

- 2** Press the desired dial keys.

Key	Remote command
<b>[1]</b>	Repeat message (during playback). <sup>*1</sup>
<b>[2]</b>	Skip message (during playback).
<b>[4]</b>	Play new messages.
<b>[5]</b>	Play all messages.
<b>[9]</b>	Stop recording/ playback. <sup>*2</sup>
<b>[0]</b>	Turn answering system off.
<b>[*][4]</b>	Erase currently playing message.
<b>[*][5]</b>	Erase all messages.
<b>#[1][7]</b>	Record a greeting message for line 1 only.
<b>#[2][7]</b>	Record a greeting message for line 2 only.
<b>#[0][7]</b>	Record a common greeting message for both line 1 and line 2.
<b>#[1][8]</b>	Turn answering system on for line 1 only.
<b>#[2][8]</b>	Turn answering system on for line 2 only.
<b>#[0][8]</b>	Turn answering system on for both line 1 and line 2.

<sup>\*1</sup> If pressed within the first 5 seconds of a message, the previous message is played.

<sup>\*2</sup> To resume operation, enter a remote command within 15 seconds, or the voice guidance starts.

## Answering System

### Turning on the answering system remotely

If the answering system is off, you can turn it on remotely by calling the selected line in "Turning the answering system on" on page 39.

- 1 Dial your phone number.
- 2 Let the phone ring 15 times.
  - The unit answers your call with the greeting message.
  - You can hang up, or if you call from a touch tone phone, you can enter your remote code and begin remote operation (page 44).

### Skipping the greeting message to leave a message

You can leave a message just as any outside caller can. Call your phone number. When the answering system picks up, press **[\*]** to skip the greeting message and record your message after the beep.

## Answering system settings

### Ring count

You can change the number of times the phone rings before the unit answers calls. The default setting is "4".

**"Toll saver"**: The unit answers on the 2nd ring when new messages have been recorded, and on the 4th ring when there are no new messages. If you call your phone from outside to listen to new messages (page 44), you will know that there are no new messages when the phone rings for the 3rd time. You can then hang up without being charged for the call.

### Handset

- 1 **[MENU] → [0][6][1]**
- 2 Select the desired line.
- 3 Select the desired setting. → **[SAVE] → [OFF]**

### For Voice Mail service subscribers

If you subscribe to a flat-rate service package that includes Call Display, Call Waiting, Voice Mail, and unlimited local/regional/long distance calls, please note the following:

- To use the Voice Mail service provided by your telephone service provider rather than the unit's answering system, turn off the answering system (page 39). This unit does not have an indicator to indicate if there are new messages in your mailbox service.

## Answering System

- To use this unit's answering system rather than the Voice Mail service provided by your telephone service provider, please contact your telephone service provider to deactivate your Voice Mail service.

If your telephone service provider cannot do this:

- Set this unit's "Ring count" setting so that this unit's answering system answers calls before the Voice Mail service of your telephone service provider does. It is necessary to check the ring count required to activate the Voice Mail service provided by your telephone service provider before changing this setting.
- Change the ring count of the Voice Mail service so that the answering system can answer the call first. To do so, consult your telephone service provider.

### Caller's recording time

You can change the maximum message recording time allotted to each caller.

The default setting is "3min".

"Greeting only": The unit plays the greeting message but does not record caller messages.

#### Handset

- 1 [MENU] → [0][6][2]
- 2 Select the desired line.
- 3 Select the desired setting. → [SAVE] → [OFF]

#### Note:

- If the message memory becomes full, the unit automatically switches to the "Greeting only" mode and no new messages are recorded. If you have recorded your own greeting message, that same greeting message is announced to callers even though their messages are not recorded. If you have not recorded your own greeting message, the prerecorded message used for "Greeting only" mode is announced to callers (page 40).

### Remote code

A remote code must be entered when operating the answering system remotely. This code prevents unauthorized parties from listening to your messages remotely. The default setting is "11".

#### Handset

- 1 [MENU] → [0][6][3]
- 2 Enter the desired 2-digit remote code.  
→ [SAVE] → [OFF]

### Recording mode

You can select a recording mode.

Enhanced recording provides improved sound quality, but the total recording capacity is reduced.

The default setting is "Standard recording 60min".

#### Handset

- 1 [MENU] → [0][6][4]
- 2 Select the desired setting. → [SAVE] → [OFF]

## Answering System

### Message alert

You can select whether or not the message indicator on the handset slowly flashes in amber when new messages are recorded (page 42). The default setting is "off".

#### Handset

**1** [MENU] → [0][#]

**2** Select the desired setting. → [SAVE]  
→ [OFF]

#### Note:

- While message alert feature is on, battery operating time is shortened (page 13).
- If you have new messages and message alert feature is on, the message indicator does not indicate battery charge status (page 12). The indicator slowly flashes in amber until you listen to all new messages.



## Multi-unit Operation

### Intercom

Intercom calls can be made:

- between the handset and base unit
- between handsets

#### Note:

- If you receive an outside call while talking on the intercom, you hear 2 tones (page 36). To answer the call with the handset, press **[LINE1]** or **[LINE2]** that is flashing on the handset. To answer the call with the base unit, press **[LINE1]** or **[LINE2]** that is flashing on the base unit.
- You can locate a misplaced handset by paging it (handset locator).

### Making an intercom call

#### Handset

- 1 [INTERCOM]**
- 2** To page the base unit, press **[0]**.  
To page another handset, enter its extension number (**[1] – [8]**).
  - The destination unit beeps for 1 minute.
  - To stop paging, press **[OFF]**.
- 3** When you finish talking, press **[OFF]**.

#### Base unit

- 1 [INTERCOM]**
- 2** To page a specified handset, enter its extension number (**[1] – [8]**).  
To page all handsets, press **[0]**.
  - The destination unit(s) beeps for 1 minute.

- To stop paging, press **[INTERCOM]**.
- Even if you call all handsets, only the handset user who answers first can take the intercom call.

- 3** When you finish talking, press **[SP-PHONE]**.

### Answering an intercom call

#### Handset

- 1** Press **[↶]** to answer the page.
- 2** When you finish talking, press **[OFF]**.

#### Base unit

- 1** Press **[INTERCOM]** to answer the page.
- 2** When you finish talking, press **[INTERCOM]**.

#### Note for handset and base unit:

- The ringer volume for intercom calls follows the higher volume level of the 2 lines (page 37).
- When the ringer volume is set to off for both lines, the handset or the base unit rings at the low level for intercom calls.

## Multi-unit Operation

### Transferring calls

Outside calls can be transferred between the handset and base unit, and between 2 handsets.

#### Handset

- 1 During an outside call, press **[INTERCOM]** to put the call on hold.
- 2 To page the base unit, press **[0]**.  
To page another handset, enter its extension number (**[1] – [8]**).
  - If you do not wish to announce the transfer, skip to step 4.
- 3 Wait for the paged party to answer.
  - If the paged party does not answer, press **[LINE1]** or **[LINE2]** that is flashing on the handset to return to the outside call.
- 4 To complete the transfer, press **[OFF]**.
  - The outside call is being routed to the unit.

#### Base unit

- 1 During an outside call, press **[INTERCOM]** to put the call on hold.
- 2 To page a specified handset, enter its extension number (**[1] – [8]**).  
To page all handsets, press **[0]**.
  - If you do not wish to announce the transfer, skip to step 4.
  - Even if you call all handsets, only the handset user who answers first can take the transferred call.

- 3 Wait for the paged party to answer.
  - If the paged party does not answer, press **[LINE1]** or **[LINE2]** that is flashing to return to the outside call.
- 4 To complete the transfer, press **[SP-PHONE]**.
  - The outside call is being routed to the handset.

### Answering transferred calls

#### Handset

Press **[↶]** to answer the page.

#### Base unit

Press **[INTERCOM]** to answer the page.

#### Note for handset and base unit:

- After the paging party disconnects, you can talk to the outside caller.
- If the paging party hangs up before you answer the page, "Incoming call" is displayed. Press **[LINE1]** or **[LINE2]** on the handset or **[LINE1]** or **[LINE2]** on the base unit to take the transferred call.

## Multi-unit Operation

### Transferring a call to the answering system

When you answer a call and the caller wants to talk to someone who is not available, you can transfer the caller to the answering system, where the caller can leave a message.

Tell the outside caller you will transfer him or her to the answering system.

#### Handset

- 1 During an outside call, press **[INTERCOM]** to put the call on hold.
- 2 Press **[9]** to hang up the call.

#### Base unit

- 1 During an outside call, press **[INTERCOM]** to put the call on hold.
- 2 Press **[9]** to hang up the call.

#### Note for handset and base unit:

- After you press **[9]**, the caller hears the greeting message (page 40) and can leave a message after the beep.

### Conference calls

#### Conference call with 2 outside calls

While you are talking with an outside caller, you can make or answer a 2nd call on the other line, and then combine the calls to establish a conference call.

#### Handset

- 1 During an outside call, press **[HOLD]** 2 times.
- 2 To answer a 2nd call, press **[LINE1]** or **[LINE2]**.  
To make a 2nd call, press **[LINE1]** or **[LINE2]**, then dial the phone number.
- 3 When the 2nd call is connected, press **[CONF]** to make a conference call.
  - To hang up only one line, press **[LINE1]** or **[LINE2]** for the party with which you want to continue talking.
  - To put both lines on hold, press **[HOLD]**. To talk with only one caller, press **[LINE1]** or **[LINE2]** for the party with which you want to continue talking. To resume both lines, press **[CONF]**.

#### Base unit

- 1 During an outside call, press **[HOLD]**.
- 2 To answer a 2nd call, press **[LINE1]** or **[LINE2]**.  
To make a 2nd call, press **[LINE1]** or **[LINE2]**, then dial the phone number.

## Multi-unit Operation

- 3 When the 2nd call is connected, press **[CONF]** to make a conference call.
  - To hang up only one line, press **[LINE1]** or **[LINE2]** for the party with which you want to continue talking.
  - To put both lines on hold, press **[HOLD]**. To talk with only one caller, press **[LINE1]** or **[LINE2]**. To resume both lines, press **[CONF]**.

### Note for handset and base unit:

- A maximum of 4 parties (including 1 or 2 outside parties) can join a conversation.

### Conference call with an outside call and an intercom call

While you are talking with an outside caller, one more extension can join the conversation and establish a conference call.

#### Handset

- 1 During an outside call, press **[INTERCOM]** to put the call on hold.
- 2 To page the base unit, press **[0]**. To page another handset, enter its extension number (**[1] – [8]**).
- 3 When the paged party answers, press **[CONF]** to make a conference call.
  - To leave the conference, press **[OFF]**. The other 2 parties can continue the conversation.

#### Base unit

- 1 During an outside call, press **[INTERCOM]** to put the call on hold.

- 2 To page a specified handset, enter its extension number (**[1] – [8]**). To page all handsets, press **[0]**.

- 3 When the paged party answers, press **[CONF]** on the base unit to make a conference call.
  - To leave the conference, press **[SP-PHONE]**. The other 2 parties can continue the conversation.

### Note for handset and base unit:

- The outside call can be put on hold by pressing **[HOLD]**. Only the person who placed the call on hold can resume the full conference by pressing **[CONF]** on the handset or **[CONF]** on the base unit.
- A maximum of 4 parties (including 1 or 2 outside parties) can join a conversation.

## Multi-unit Operation

### Room monitor

This feature allows you to monitor the room where a unit is located. The monitored unit does not ring, allowing you to easily monitor a baby's room, for example, from different areas of the house.

#### Note:

- You can place the handset on the base unit or charger while monitoring using the speakerphone.

### Setting room monitor

To use the room monitor feature, you need to set the destination unit to be monitored beforehand.

- “OFF” (Default): denies access from other units.
- “on”: allows the unit to be monitored.

### Turn on/off the handset's room monitor feature

#### Handset

- 1 [MENU] → [0][9]
- 2 Select the desired setting.
- 3 [SAVE] → [OFF]

### Turn on/off the base unit's room monitor feature

#### Handset

- 1 [MENU] → [0][\*][3]
- 2 Select the desired setting.

### 3 [SAVE] → [OFF]

### Monitoring a room

#### Important:

- Before using this feature, set room monitor of the destination unit to “on” to allow access by other units.
- If you receive an outside call while monitoring a room, you hear 2 tones (page 36). To answer the call with the handset, press [LINE1] or [LINE2] that is flashing on the handset. To answer the call with the base unit, press [LINE1] or [LINE2] that is flashing on the base unit.

#### Handset

- 1 [INTERCOM] → [MONITOR]
- 2 To page the base unit, press [0]. To page another handset, enter its extension number ([1] – [8]).
  - You can listen to the audio.
- 3 Press [OFF] to stop monitoring.

#### Base unit

- 1 [INTERCOM] → [MUTE]
- 2 To page a specified handset, enter its extension number ([1] – [8]).
  - You can listen to the audio.
- 3 Press [INTERCOM] to stop monitoring.

## Multi-unit Operation

### Registering a handset

The included handset and base unit are preregistered. If for some reason the handset is not registered to the base unit, register the handset.

**Important:**

- If you have already deregistered the handset, perform steps 2 and 3 only.

**1 Handset:**  
[MENU] → [0][0][1]

**2 Base unit:**  
Press and hold [INTERCOM] until the IN USE indicator flashes.

- After the IN USE indicator starts flashing, the rest of the procedure must be completed within 1 minute.

**3 Handset:**  
Press [OK], then wait until a beep sounds.

**4 [OFF]**

### Registering an additional handset

See page 5 for information on the available model and extension numbers.  
Start from step 2.

### Deregistering a handset

**Handset**

**1 [MENU] → [0][0][2]**


**2 [3][3][5] → [OK]**

## Useful Information

### Additional accessories


#### Headset (optional)


Connecting a headset to the handset allows hands-free phone conversations. We recommend using the Panasonic headset noted on page 5.



- Headset shown is RP-TCA86.

#### Switching a call between headset and handset speakerphone

To switch to the handset speakerphone, press **[]**.

To return to the headset, press **[]**.

#### Wall mounting (optional)

By purchasing the optional wall-mounting adaptor (page 5), you can mount the base unit on a wall.

#### Belt clip (optional)

By purchasing the optional belt clip (page 5), you can hang the handset on your belt or pocket.

## Useful Information

### Error messages

If the unit detects a problem, one of the following messages is shown on the display.

Display message	Cause/solution
<b>Busy</b>	<ul style="list-style-type: none"> <li>• The called handset or base unit is in use.</li> <li>• Other users are using the line(s). Wait until the line status icon goes out.</li> <li>• Privacy mode is on for the call you tried to join (page 25).</li> <li>• The handset you tried to copy phonebook items to is in use.</li> <li>• The handset you are calling is too far from the base unit.</li> </ul>
<b>Denied</b>	<ul style="list-style-type: none"> <li>• The room monitor feature is turned off on the destination handset or base unit and the room cannot be monitored (page 53).</li> </ul>
<b>Error!!</b>	<ul style="list-style-type: none"> <li>• The handset's registration has failed. Move the handset and base unit away from all electrical appliances and try again.</li> <li>• Another handset user tried to send phonebook items to you but there was an error. Have the other user re-send the items to you (page 29).</li> </ul>
<b>Error!! All handsets registered. Maximum is 8.</b>	<ul style="list-style-type: none"> <li>• 8 handsets have already been registered to the base unit. A previously deregistered handset number may still be retained in the base unit. To register an additional handset, erase the unnecessary handset number using the base unit: Press and hold <b>[INTERCOM]</b> until the IN USE indicator flashes. → Press and hold the handset's extension number (<b>[1]</b> – <b>[8]</b>) that you want to cancel/delete from the base unit until a beep sounds.</li> </ul>
<b>---Incomplete---</b>	<ul style="list-style-type: none"> <li>• The destination handset's phonebook memory is full. Erase unnecessary items from the destination handset's phonebook (page 28).</li> <li>• The destination handset is out of area.</li> <li>• The destination handset user may have pressed <b>[↶]</b> or <b>[↷]</b>.</li> </ul>



**Useful Information**

<b>Display message</b>	<b>Cause/solution</b>
<b>Invalid</b>	<ul style="list-style-type: none"><li>• There is no handset registered to the base unit matching the extension number you entered.</li><li>• You selected your own extension number.</li></ul>
<b>Invalid. Please register to the base unit</b>	<ul style="list-style-type: none"><li>• The handset is not registered to the base unit. Register the handset (page 54).</li></ul>
<b>No items stored</b>	<ul style="list-style-type: none"><li>• Your phonebook or redial list is empty.</li></ul>
<b>No link to base. Move closer to base, try again.</b>	<ul style="list-style-type: none"><li>• The handset has lost communication with the base unit. Move closer to the base unit, and try again.</li><li>• Confirm that the base unit's AC adaptor is plugged in.</li><li>• Raise the base unit antennas.</li><li>• The handset's registration may have been cancelled. Re-register the handset (page 54).</li></ul>
<b>Phonebook full</b>	<ul style="list-style-type: none"><li>• There is no space to store new items in the phonebook. Erase unnecessary items (page 28).</li></ul>
<b>Please lift up and try again.</b>	<ul style="list-style-type: none"><li>• A handset button was pressed while the handset was on the base unit or charger. Lift the handset and press the button again.</li></ul>
<b>System is busy. Please try again later.</b>	<ul style="list-style-type: none"><li>• Other units are in use and the system is busy. Try again later.</li><li>• Another user is listening to messages. Try again later.</li></ul>

## Useful Information

### Troubleshooting



#### General use

Problem	Cause/solution
The unit does not work.	<ul style="list-style-type: none"> <li>• Make sure the battery is installed correctly and fully charged (page 12).</li> <li>• Check the connections (page 9–11).</li> <li>• Unplug the base unit's AC adaptor to reset the unit. Reconnect the adaptor and try again.</li> <li>• The handset has not been registered to the base unit. Register the handset (page 54).</li> </ul>
I cannot hear a dial tone.	<ul style="list-style-type: none"> <li>• Confirm the telephone line cord is properly connected (page 10).</li> <li>• Disconnect the unit from the telephone line and connect a known working telephone. If the working telephone operates properly, contact our service personnel to have the unit repaired. If the working telephone does not operate properly, contact your telephone service provider.</li> </ul>

#### Programmable settings

Problem	Cause/solution
I cannot program items.	<ul style="list-style-type: none"> <li>• While another user is listening to messages or the answering system is answering a call, you cannot program items. Try again later.</li> </ul>
While programming, the handset starts to ring.	<ul style="list-style-type: none"> <li>• A call is being received. Answer the call and start again after hanging up.</li> </ul>

#### Battery recharge

Problem	Cause/solution
I fully charged the battery, but  continues to flash, or  is displayed.	<ul style="list-style-type: none"> <li>• Clean the charge contacts and charge again (page 12).</li> <li>• The battery may need to be replaced with a new one (page 12).</li> </ul>
The handset display is blank.	<ul style="list-style-type: none"> <li>• Confirm that the battery is properly installed.</li> <li>• Fully charge the battery (page 12).</li> </ul>

## Useful Information

### Making/answering calls, intercom

Problem	Cause/solution
Static is heard, sound cuts in and out. Interference from other electrical units.	<ul style="list-style-type: none"> <li>• Move the handset and base unit away from other electrical appliances.</li> <li>• Move closer to the base unit.</li> <li>• Raise the base unit antennas.</li> <li>• Turn on the clarity booster feature (page 24).</li> <li>• If your unit is connected to a telephone line with DSL service, we recommend connecting a noise filter between the base unit and the telephone line jack. Contact your DSL provider for details.</li> </ul>
The handset and base unit do not ring.	<ul style="list-style-type: none"> <li>• The ringer volume is turned off. Adjust it (page 22, 37).</li> </ul>
I cannot make a call.	<ul style="list-style-type: none"> <li>• The dialing mode may be set incorrectly. Change the setting (page 18).</li> <li>• The base unit (including answering system) or another handset is in use. Try again later.</li> </ul>
I cannot redial by pressing <b>[REDIAL]</b> .	<ul style="list-style-type: none"> <li>• If the last number dialed was more than 48 digits long, the number will not be redialed correctly. Dial the number manually.</li> </ul>
I cannot have a conversation using the headset.	<ul style="list-style-type: none"> <li>• Make sure that an optional headset is connected properly (page 55).</li> <li>• If "SP-phone" is displayed on the handset, press <b>[↶]</b> to switch to the headset.</li> </ul>
I cannot make long distance calls.	<ul style="list-style-type: none"> <li>• Make sure that you have long distance service.</li> </ul>
I cannot page the handset or base unit.	<ul style="list-style-type: none"> <li>• The called handset is too far from the base unit.</li> <li>• The called unit is in use. Try again later.</li> </ul>
I cannot turn the clarity booster on.	<ul style="list-style-type: none"> <li>• Another handset is already using this feature.</li> </ul>

## Useful Information

### Call Display

Problem	Cause/solution
The handset does not display the caller's name and/or phone number.	<ul style="list-style-type: none"> <li>● You have not subscribed to Call Display service. Contact your telephone service provider to subscribe.</li> <li>● If your base unit is connected to any additional telephone equipment such as a Call Display box or cordless telephone jack, disconnect the base unit from the equipment and plug the base unit directly into the wall jack.</li> <li>● If your base unit is connected to a telephone line with DSL service, we recommend connecting a noise filter between the base unit and the telephone line jack. Contact your DSL provider for details.</li> <li>● The name display service may not be available in some areas. Contact your telephone service provider for details.</li> <li>● Other telephone equipment may be interfering with this unit. Disconnect the other equipment and try again.</li> <li>● The caller requested not to send caller information (page 31).</li> <li>● If a call is being transferred to you, the caller information is not displayed.</li> <li>● Generally, caller information is displayed from the 2nd ring.</li> </ul>
I cannot dial the phone number edited in the caller list.	<ul style="list-style-type: none"> <li>● The phone number you dialed might have an incorrectly edited pattern (for example, the long distance "1" or the area code is missing). Edit the phone number with another pattern (page 32).</li> </ul>
The 2nd caller's information is not displayed during an outside call.	<ul style="list-style-type: none"> <li>● In order to use Call Display, Call Waiting, or Visual Call Waiting, you must first contact your telephone service provider and subscribe to the desired service. After subscribing, you may need to contact your telephone service provider again to activate this specific service, even if you already subscribed to both Call Display and Visual Call Waiting services.</li> </ul>

**Useful Information**

**Answering system**

Problem	Cause/solution
I cannot listen to messages from a remote location.	<ul style="list-style-type: none"> <li>● A touch tone phone is required for remote operation.</li> <li>● Enter the remote code correctly (page 44).</li> <li>● The answering system is off. Turn it on (page 46).</li> </ul>
The unit does not record new messages.	<ul style="list-style-type: none"> <li>● The answering system is not turned on for the line you wish to record messages from. Select the desired line or both lines by pressing <b>[LINE SELECT]</b> repeatedly, then turn the answering system on (page 39, 46).</li> <li>● The recording time is set to "Greeting only". Select a different setting (page 47).</li> <li>● The message memory is full. Erase unnecessary messages (page 41).</li> <li>● The answering system is activated for both lines, and the 1st caller is leaving a voice message. The 2nd caller cannot leave a message, but the caller information will be stored (page 32).</li> <li>● If you subscribe to the Voice Mail service, messages are recorded by the telephone service provider not your telephone (page 46).</li> </ul>
I cannot operate the answering system.	<ul style="list-style-type: none"> <li>● Someone is operating the answering system.</li> <li>● If someone is talking on a conference call, you cannot operate the answering system. Try again later.</li> </ul>
The message indicator on the handset slowly flashes in amber.	<ul style="list-style-type: none"> <li>● New messages have been recorded. Listen to the new messages (page 41, 42).</li> </ul>

## Useful Information

### Important information

**NOTICE:**

This equipment meets the applicable Industry Canada Terminal Equipment Technical Specifications. This is confirmed by the registration number. The abbreviation, "IC:", before the registration number signifies that registration was performed based on a Declaration of Conformity indicating that Industry Canada technical specifications were met. It does not imply that Industry Canada approved the equipment. And, the term "IC:" signifies that Industry Canada radio technical specifications were met.

Before installing this equipment, users should ensure that it is permissible to be connected to the facilities of the local telecommunications company. The equipment must also be installed using an acceptable method of connection. The customer should be aware that compliance with the above conditions may not prevent degradation of service in some situations.

Repairs to certified equipment should be coordinated by a representative designated by the supplier. Any repairs or alterations made by the user to this equipment, or equipment malfunctions, may give the telecommunications company cause to request the user to disconnect the equipment.

Users should ensure, for their own protection, that the electrical ground connections of the power utility, telephone lines and internal metallic water pipe system, if present, are connected together. This precaution may be particularly important in rural areas.

**Caution:**

Users should not attempt to make such connections themselves, but should contact the appropriate electric inspection authority, or electrician, as appropriate.

**NOTICE:**

The **Ringer Equivalence Number (REN)** assigned to each terminal device provides an indication of the maximum number of terminals allowed to be connected to a telephone interface. The termination on an interface may consist of any combination of devices subject only to the requirement that the sum of the Ringer Equivalence Numbers of all the devices does not exceed 5. The Ringer Equivalence Number (REN) of this unit:  
(found on the bottom of the unit).

**NOTICE:**

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Privacy of communications may not be ensured when using this telephone.

Some cordless telephones operate at frequencies that may cause interference to nearby TVs and VCRs. To minimize or prevent such interference, the base of the cordless telephone should not be placed near, or on top of, a TV or VCR. If interference is experienced, move the cordless telephone further away from the TV or VCR. This will often reduce, or eliminate, interference.



## ***Useful Information***

### **RF Exposure Warning:**

The product complies with IC radiation exposure limits set forth for an uncontrolled environment. To comply with IC RF exposure requirements, the base unit must be installed and operated with its antenna located 20 cm (8 inches) or more between antenna and all person's body (excluding extremities of hands, wrist and feet). The handset may be carried and operated with only the optional specific belt-clip. Other non-tested belt-clips or similar body-worn accessories may not comply and must be avoided. The product must not be collocated or operated in conjunction with any other antenna or transmitter.



## Useful Information

## Specifications

### General

<b>Operating environment</b>	5 °C – 40 °C (41 °F – 104 °F)
<b>Frequency</b>	5.76 GHz – 5.84 GHz

### Base unit

<b>Dimensions</b>	Approx. height 55 mm x width 230 mm x depth 140 mm (2 <sup>5</sup> / <sub>32</sub> inches x 9 <sup>1</sup> / <sub>16</sub> inches x 5 <sup>1</sup> / <sub>2</sub> inches)
<b>Mass (Weight)</b>	Approx. 460 g (1.01 lb.)
<b>Power consumption</b>	Standby: Approx. 2.3 W Maximum: Approx. 6.1 W
<b>Power output</b>	200 mW (max.)
<b>Power supply</b>	AC adaptor (120 V AC, 60 Hz)

### Handset

<b>Dimensions</b>	Approx. height 156 mm x width 49 mm x depth 35 mm (6 <sup>1</sup> / <sub>8</sub> inches x 1 <sup>15</sup> / <sub>16</sub> inches x 1 <sup>3</sup> / <sub>8</sub> inches)
<b>Mass (Weight)</b>	Approx. 150 g (0.33 lb.)
<b>Power output</b>	200 mW (max.)
<b>Power supply</b>	Ni-MH battery (2.4 V, 830 mAh)

### Note:

- Design and specifications are subject to change without notice.
- The illustrations in these instructions may vary slightly from the actual product.



## Useful Information

### Warranty

#### Panasonic Canada Inc.

5770 Ambler Drive, Mississauga, Ontario L4W 2T3

#### PANASONIC PRODUCT - LIMITED WARRANTY

Panasonic Canada Inc. warrants this product to be free from defects in material and workmanship and agrees to remedy any such defect for a period as stated below from the date of original purchase.

**Telephone Accessory / Product - One (1) year, parts and labour**

#### LIMITATIONS AND EXCLUSIONS

This warranty does not apply to products purchased outside Canada or to any product which has been improperly installed, subjected to usage for which the product was not designed, misused or abused, damaged during shipping, or which has been altered or repaired in any way that affects the reliability or detracts from the performance, nor does it cover any product which is used commercially. Dry cell batteries are also excluded from coverage under this warranty. Rechargeable batteries are warranted for ninety (90) days from date of original purchase.

This warranty is extended to the original end user purchaser only. A purchase receipt or other proof of date of original purchase is required before warranty service is performed.

**THIS EXPRESS, LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

**IN NO EVENT WILL PANASONIC CANADA INC. BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES.**

In certain instances, some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, or the exclusion of implied warranties, so the above limitations and exclusions may not be applicable.

#### WARRANTY SERVICE

**FOR PRODUCT OPERATION ASSISTANCE**, please contact:

Our Customer Care Centre: Telephone #: (905) 624-5505  
1-800 #: 1-800-561-5505  
Fax #: (905) 238-2360  
Email link: "Contact Us" on [www.panasonic.ca](http://www.panasonic.ca)

**FOR PRODUCT REPAIRS**, please locate your nearest Authorized Servicentre at [www.panasonic.ca](http://www.panasonic.ca) :

Link : "Servicentres™ locator" under "Customer support"

#### **IF YOU SHIP THE PRODUCT TO A SERVICENTRE**

Carefully pack and send prepaid, adequately insured and preferably in the original carton.  
Include details of the defect claimed, and proof of date of original purchase.





## Index

### Index

- A** Answering calls: 22
  - Answering system
    - Erasing messages: 41, 43, 45
    - Listening to messages: 41, 42
    - Turning on/off: 39, 43, 45
  - Auto talk: 22
- B** Battery
  - Charge: 12
  - Installation: 12
  - Level: 13
  - Performance: 13
  - Replacement: 12
  - Belt clip: 5, 55
  - Booster (Clarity booster): 24
- C** Call Display service: 31
  - Call screening: 39
  - Call share: 25
  - Call Waiting: 24
  - Caller list
    - Calling back: 32
    - Editing: 32
    - Erasing: 33
    - Storing: 33
    - Viewing: 32
  - Chain dial: 29
  - CID (Call Display): 32
  - Conference calls: 51
  - Connections
    - AC adaptor: 9
    - Noise filter: 11
    - Telephone line cord: 10, 11
- D** Date and time: 18
  - Deregistration: 54, 56
  - Dialing mode: 18
  - Display
    - Contrast: 36
    - Language: 18
- E** Error messages: 56
- F** Flash: 24
  - Flash time: 38
- G** Greeting message: 40
- H** Handset locator: 49
  - Headset, optional: 55
  - Hold: 23
- I** Installation
  - Base unit: 9
  - Handset: 12
  - Intercom: 49
  - Interrupt tone: 36
- K** Key tone: 36
- L** Line selection: 19
- M** Making calls: 20
  - MEMO: 44
  - Memory capacity (message recording): 39
  - Message alert: 48
  - Missed calls: 31
  - Mute: 24
- N** Navigator key: 15
- P** Pause: 27, 30
  - Phonebook: 27
  - Phonebook copy: 29
  - Power failure: 9
  - Privacy feature: 25
  - Pulse service: 24
- R** Recording time: 47
  - Redial list: 20
  - Registration: 54
  - Remote code: 47
  - Remote operation: 44
  - Ring count: 46
  - Ringer off
    - Base unit: 22
    - Handset: 22, 37
  - Ringer tone
    - Base unit: 37
    - Handset: 37
  - Room monitor: 53

**Index**

- Rotary service: 24
- S** Speed dialer: 30
- SP-phone: 20, 21
- T** Toll saver: 46
- Tone service: 24
- Transferring calls: 50
- Troubleshooting: 58
- V** VE (Voice Enhancer): 25
- Visual Call Waiting: 31
- Voice guidance: 42, 45
- Voice guidance language: 18
- Voice prompt: 18, 38
- Volume
  - Base unit ringer: 22
  - Base unit speaker: 21
  - Handset receiver: 20
  - Handset ringer: 37
  - Handset speaker: 20
- W** Wall-mounting: 5, 55
- Warranty: 65



**Panasonic Canada Inc.**

5770 Ambler Drive, Mississauga, Ontario L4W 2T3

**Copyright:**

This material is copyrighted by Panasonic Communications Co., Ltd., and may be reproduced for internal use only. All other reproduction, in whole or in part, is prohibited without the written consent of Panasonic Communications Co., Ltd.

© 2006 Panasonic Communications Co., Ltd. All Rights Reserved.



\*TG6700C\*

**PQQX15232ZA DM0506FF0**

