Panasonic

Operating Instructions

Digital Corded/Cordless Answering System

Model No.

KX-TGF350C

KX-TGF352C

KX-TG132CSK

KX-TG133CSK



Model shown is KX-TGF350.

Before initial use, see "Getting Started" on page 8.

Thank you for purchasing a Panasonic product.

Please read these operating instructions before using the unit and save them for future reference.

For assistance, please visit our Support page:

www.panasonic.ca/english/support

Table of Contents

Introduction Model composition
Important Information For your safety
Getting Started Setting up 8 Controls 11 Display icons 12 Language settings 12 Date and time 13 Recording your greeting message 13 Other settings 13
Making/Answering CallsMaking calls14Answering calls15Useful features during a call15
Intercom
Call Block Using the [CALL BLOCK] button19 Storing unwanted callers19
PhonebookPhonebook22Speed dial24One-touch dial buttons25
Programming Menu list 27 Alarm 32 Night mode 33 Baby monitor 33 Other programming 35 Registering a unit 36
Call Display Service Using Call Display service
Answering System Answering system

Answering system settings	45
Useful Information	
Voicemail service	47
Wall mounting	48
Error messages	50
Troubleshooting	
Industry Canada Notices and other	
information	55
Warranty	56
Index	
Index	57

Model composition

Series	Model No.	Base unit	Handset	
Series		Part No.	Part No.	Quantity
KX-TGF350 series	KX-TGF350	KX-TGF350	KX-TGFA30	1
	KX-TGF352	KX-TGF350	KX-TGFA30	2
	KX-TG132SK	KX-TGF350	KX-TGFA30	2
	KX-TG133SK	KX-TGF350	KX-TGFA30	3

Accessory information

Supplied accessories

	Quantity				
No.	Accessory item/Part number	KX-TGF350	KX-TGF352 KX-TG132SK	KX-TG133SK	
1	AC adaptor/PNLV226	1	1	1	
2	Telephone line cord	1	1	1	
3	Desk stand/Wall mounting adaptor*1	1	1	1	
4	Corded handset	1	1	1	
(5)	Corded handset cord	1	1	1	
6	Rechargeable batteries*2	2	4	6	
7	Handset cover*3	1	2	3	
8	Belt clip	1	2	3	
9	Charger	1	2	3	

- *1 The desk stand/wall mounting adaptor comes attached to the base unit.
- *2 See page 4 for replacement battery information.
- *3 The handset cover comes attached to the handset.









3















7



8





Introduction

Additional/replacement accessories

Please contact your nearest Panasonic dealer for sales information.

Accessory item	Model number/Specifications
Rechargeable batteries	HHR-4DPA*1
	Battery type: - Nickel metal hydride (Ni-MH) - 2 x AAA (R03) size for each handset
Headset	KX-TCA60, KX-TCA93, KX-TCA400, KX-TCA430
Key detector	KX-TGA20*2

^{*1} Replacement batteries may have a different capacity from that of the supplied batteries.

Other information

- Design and specifications are subject to change without notice.
- The illustrations in these instructions may vary slightly from the actual product.

Expanding your phone system

Handset (optional): KX-TGFA30C	
You can expand your phone system by registering optional handsets (6 max.) to a single base unit. Optional handsets may be a different colour from that of the supplied handsets.	

^{*2} By registering the key detector (4 max.) to a Panasonic Digital Cordless Phone and attaching it to an easy-to-lose item in advance, you can locate and find the mislaid item to which the key detector is attached. Please visit our Web site: www.panasonic.net/pcc/products/telephone/p/tga20/

Important Information

For your safety

To prevent severe injury and loss of life/property, read this section carefully before using the product to ensure proper and safe operation of your product.

↑ WARNING

Power connection

- Use only the power source marked on the product.
- Do not overload power outlets and extension cords.
 This can result in the risk of fire or electric shock.
- Completely insert the AC adaptor/power plug into the power outlet. Failure to do so may cause electric shock and/or excessive heat resulting in a fire.
- Regularly remove any dust, etc. from the AC adaptor/ power plug by pulling it from the power outlet, then wiping with a dry cloth. Accumulated dust may cause an insulation defect from moisture, etc. resulting in a fire.
- Unplug the product from power outlets if it emits smoke, an abnormal smell, or makes an unusual noise.
 These conditions can cause fire or electric shock.
 Confirm that smoke has stopped emitting and contact us by visiting our Support page:

www.panasonic.ca/english/support

- Unplug from power outlets and never touch the inside of the product if its casing has been broken open.
- Never touch the plug with wet hands. Danger of electric shock exists.

Installation

- To prevent the risk of fire or electrical shock, do not expose the product to rain or any type of moisture.
- Do not place or use this product near automatically controlled devices such as automatic doors and fire alarms. Radio waves emitted from this product may cause such devices to malfunction resulting in an accident.
- Do not allow the AC adaptor or telephone line cord to be excessively pulled, bent or placed under heavy objects.

Operating safeguards

- Unplug the product from power outlets before cleaning.
 Do not use liquid or aerosol cleaners.
- Do not disassemble the product.
- Do not spill liquids (detergents, cleansers, etc.) onto the telephone line cord plug, or allow it to become wet at all. This may cause a fire. If the telephone line cord plug becomes wet, immediately pull it from the telephone wall jack, and do not use.
- Do not excessively pull the corded handset cord from the base unit. This may cause the base unit to fall, resulting in injury.

Medical

 Consult the manufacturer of any personal medical devices, such as pacemakers or hearing aids, to determine if they are adequately shielded from external RF (radio frequency) energy. (The product operates in

- the frequency range of 1.92 GHz to 1.93 GHz, and the RF transmission power is 115 mW (max.).)
- Do not use the product in health care facilities if any regulations posted in the area instruct you not to do so. Hospitals or health care facilities may be using equipment that could be sensitive to external RF energy.

♠ CAUTION

Installation and location

- Never install telephone wiring during an electrical storm
- Never install telephone line jacks in wet locations unless the jack is specifically designed for wet locations
- Never touch uninsulated telephone wires or terminals unless the telephone line has been disconnected at the network interface.
- Use caution when installing or modifying telephone lines
- The AC adaptor is used as the main disconnect device.
 Ensure that the AC outlet is installed near the product and is easily accessible.
- This cordless handset is unable to make calls when:
 - the handset batteries need recharging or have failed.
 - there is a power failure.

Ni-MH rechargeable batteries

- We recommend using the batteries noted on page 4.
 USE ONLY rechargeable Ni-MH batteries AAA (R03) size.
- Do not mix old and new batteries.
- Do not open or mutilate the batteries. Released electrolyte from the batteries is corrosive and may cause burns or injury to the eyes or skin. The electrolyte is toxic and may be harmful if swallowed.
- Exercise care when handling the batteries. Do not allow conductive materials such as rings, bracelets, or keys to touch the batteries, otherwise a short circuit may cause the batteries and/or the conductive material to overheat and cause burns.
- Charge the batteries provided with or identified for use with this product only, in accordance with the instructions and limitations specified in this manual.
- Only use a compatible base unit (or charger) to charge the batteries. Do not tamper with the base unit (or charger). Failure to follow these instructions may cause the batteries to swell or explode.

Attention:



A nickel metal hydride battery that is recyclable powers the product you have purchased. Please call 1-800-8-BATTERY (1-800-822-8837) for information on how to recycle this battery.

Important Information

Note when using alkaline batteries for power backup

- The batteries should be used correctly, otherwise the unit may be damaged due to battery leakage.
- Do not charge, short-circuit, disassemble, or heat the batteries.
- Do not dispose of batteries in a fire.
- · Remove all the batteries when replacing
- Do not mix old, new or different types of batteries.
- It is recommended that batteries are replaced annually.
- It is recommended that batteries are replaced after a power outage.

Important safety instructions

When using your product, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and injury to persons, including the following:

- Do not use this product near water for example, near a bathtub, washbowl, kitchen sink, or laundry tub, in a wet basement or near a swimming pool.
- Avoid using a telephone (other than a cordless type) during an electrical storm. There may be a remote risk of electric shock from lightning.
- 3. Do not use the telephone to report a gas leak in the vicinity of the leak.
- Use only the power cord and batteries indicated in this manual. Do not dispose of batteries in a fire. They may explode. Check with local codes for possible special disposal instructions.

SAVE THESE INSTRUCTIONS

For best performance

Base unit location/avoiding noise

The base unit and other compatible Panasonic units use radio waves to communicate with each other.

- For maximum coverage and noise-free communications, place your base unit:
 - at a convenient, high, and central location with no obstructions between the cordless handset and base unit in an indoor environment.
 - away from electronic appliances such as TVs, radios, personal computers, wireless devices, or other phones.
 - facing away from radio frequency transmitters, such as external antennas of mobile phone cell stations. (Avoid putting the base unit on a bay window or near a window.)
- Coverage and voice quality depends on the local environmental conditions.
- If the reception for a base unit location is not satisfactory, move the base unit to another location for better reception.

Environment

- Keep the product away from electrical noise generating devices, such as fluorescent lamps and motors.
- The product should be kept free from excessive smoke, dust, high temperature, and vibration.
- The product should not be exposed to direct sunlight.

- Do not place heavy objects on top of the product.
- When you leave the product unused for a long period of time, unplug the product from the power outlet.
- The product should be kept away from heat sources such as heaters, kitchen stoves, etc. It should not be placed in rooms where the temperature is less than 0 °C (32 °F) or greater than 40 °C (104 °F). Damp basements should also be avoided.
- The maximum calling distance may be shortened when the product is used in the following places: Near obstacles such as hills, tunnels, underground, near metal objects such as wire fences, etc.
- Operating the product near electrical appliances may cause interference. Move away from the electrical appliances.

Routine care

- Wipe the outer surface of the product with a soft moist cloth.
- Do not use benzine, thinner, or any abrasive powder.

Other information

CAUTION: Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.

Notice for product disposal, transfer, or return

 This product can store your private/confidential information. To protect your privacy/confidentiality, we recommend that you erase information such as phonebook or caller list entries from the memory before you dispose of, transfer, or return the product.

Compliance with TIA-1083 standard

Telephone handsets identified with this logo have reduced noise and interference when used with T-Coil equipped hearing aids and cochlear implants.



Specifications

• Standard:

DECT 6.0 (Digital Enhanced Cordless Telecommunications 6.0)

- Frequency range: 1.92 GHz to 1.93 GHz
- RF transmission power:

115 mW (max.)

- Power source: 120 V AC, 60 Hz
- Power consumption:

Base unit:

Standby: Approx. 0.7 W Maximum: Approx. 3.0 W

Charger:

Standby: Approx. 0.1 W Maximum: Approx. 1.8 W


Operating conditions:
 0 °C - 40 °C (32 °F - 104 °F), 20 % - 80 % relative air humidity (dry)

Setting up

Connections

■ Base unit

- ① Connect the AC adaptor to the unit by pressing the plug firmly.
- ② Connect the telephone line cord to the unit until you hear a click.
- (3) Fasten the AC adaptor cord and the telephone line cord by hooking it.
- 4 Connect the AC adaptor to the power outlet.
- (§) Connect the telephone line cord to the single-line telephone jack (RJ11C) until you hear a click.
- ⑥ A DSL/ADSL filter (not supplied) is required if you have a DSL/ADSL service.
- ⑦ Connect the corded handset cord to the corded handset and the base unit until you hear a click.

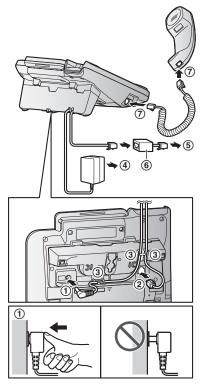


Note:

- Use only the supplied Panasonic AC adaptor PNLV226.
- Follow the directions on the display to set up the unit.


■ Charger

① Connect the AC adaptor to the power outlet.



Handset battery installation

- USE ONLY rechargeable Ni-MH batteries AAA (R03) size (A).
- Do NOT use alkaline/manganese/Ni-Cd batteries.
- Confirm correct polarities (⊕, ⊝).



 Follow the directions on the display to set up the unit.

For assistance, visit www.panasonic.ca/english/support

Handset battery charging

Charge for about 7 hours.

- Confirm "Charging" is displayed (A).
- When the batteries are fully charged, "Fully charged" is displayed.



Handset battery level

Icon	Battery level
	High
	Medium
	Low
, ,	Needs charging.
	Empty

Panasonic Ni-MH battery performance (supplied batteries)

Operation	Operating time	
In continuous use	13 hours max.*1	
Not in use (standby)	12 days max.*1	

*1 If eco mode is on.

Note:

 Actual battery performance depends on usage and ambient environment.

Base unit battery installation (for power backup)


You can insert 2 AAA (R03) batteries (not supplied) into the base unit that will power the unit temporarily in the event of a power failure.

Important:

- The following batteries can be used with the base unit:
 - Rechargeable Ni-MH batteries*1, *2 (including the batteries used in your handset(s))

- Standard (non-rechargeable) alkaline batteries*3
- Do NOT use manganese batteries.
- Confirm correct polarities (⊕, ⊖).
- *1 The base unit can fully charge Ni-MH batteries in about 15 hours.
- *2 We recommend using HHR-4DPA batteries (page 4).
- *3 Only insert alkaline batteries once a power failure occurs. Remove the alkaline batteries when power is restored.
- 1 Disconnect the telephone line cord (1).
- 2 Open the battery cover (2).
- 3 Install the batteries in the battery compartment

 (3).
- 4 Close the cover, then reconnect the telephone line cord (4).



Note:

 If your phone service provider requires additional devices in order to make and receive calls, such as a modem, you may still not be able to make and receive calls even if the base unit's backup power feature is functioning.

Base unit battery status when a power failure occurs

Icon	Battery status
Ñ	Power backup mode is on.
` D."	Battery power is low.*1

*1 If begins flashing on the base unit, replace the batteries with new ones as soon as possible. If you replace Ni-MH batteries with alkaline batteries, insert the Ni-MH batteries into the base unit again after the power is restored so that they will be recharged.

Battery saving mode setting

This feature allows the base unit to reduce its power consumption by limiting the available functions and therefore extend battery life during a power failure.

The following settings are available:

- "on": The unit will work as a standard telephone. Only the corded handset can be used to make and receive calls. (You cannot use the base unit display, phonebook, one-touch dial, answering system, speakerphone, etc.)
 - The base unit display is blank.
- "Off" (default): You can use the full functions of the base unit, but battery life is not extended.
 The brightness level for the base unit display is lowered.

Base unit

- 1 [MENU]#150
- 2 (\$): Select the desired setting.
- 3 [SAVE] \rightarrow [EXIT]

Note

 Once the battery saving mode is set to "on", the unit rings with the volume level 1 even if the ringer volume for the base unit is set to "off" to let you know an incoming call is being received.

Panasonic Ni-MH battery performance (optional batteries) when operating on backup battery power

Operation	Saving mode		
Operation	Off	On	
In continuous use	2 hours max.	7 hours max.	
Not in use (standby)	3 hours max.	8 hours max.	

Note:

10

- Battery performance depends on the type of batteries
- Actual battery performance depends on usage and ambient environment.

Note when setting up

Note for connections

- The AC adaptor must remain connected at all times. (It is normal for the adaptor to feel warm during use.)
- The AC adaptor should be connected to a vertically oriented or floor-mounted AC outlet.
 Do not connect the AC adaptor to a ceiling-mounted AC outlet, as the weight of the adaptor may cause it to become disconnected.

Note for Ni-MH battery installation

- Handset: Use the supplied rechargeable batteries.
- Handset/Base unit: For replacement, we recommend using the Panasonic rechargeable batteries noted on page 4, 5.

Note for battery charging

- It is normal for the handset to feel warm during charging.
- Clean the charge contacts of the handset and charger with a soft and dry cloth once a month.
 Before cleaning the unit, disconnect from power outlets and any telephone line cords. Clean more often if the unit is exposed to grease, dust, or high humidity.


Intelligent eco mode

This feature automatically reduces handset power consumption by suppressing handset transmission power when the handset is close to the base unit.

- When this feature is activated, **ECO** is displayed.
- Eco mode is turned off when the clarity booster is activated (page 16).

Controls

Handset




- 1 Belt clip holes
- 2 Speaker
- **③** [**↑**] (TALK)
- 4 Headset jack
- ⑤ Dial keypad (★: TONE)
- ⑥ 【♣】(SP-PHONE: Speakerphone)
- Microphone
- Receiver
- O Display
- (OFF)
- (FLASH) [CALL WAIT]
- [CALL BLOCK]
- Charge contacts
- Control type
 - A Soft keys

By pressing a soft key, you can select the feature shown directly above it on the display.

- **B** Navigator key
- (▲), (▼), (◄), or (►): Scroll through various lists and items

- VOL. (Volume: [▲] or [▼]): Adjust the receiver or speaker volume while talking.
- 【◀】□□: View the phonebook entry.
- [►] REDIAL: View the redial list.
- 【▼】 CID (Call Display): View the caller list.

Base unit



- 1 Corded handset
- 2 Receiver
- Speaker
- Display
 - The display can be moved back and forth to select the desired angle.
- **6** ONE-TOUCH DIAL buttons
- 6 Microphone
- [SPEED DIAL]
- [G [FLASH] [CALL WAIT]
- (HOLD)
- (LOCATOR) [INTERCOM]
 - You can locate a misplaced handset by pressing [LOCATOR].
- Dial keypad (★: TONE)
- (EXIT)
- (REDIAL) [PAUSE]
- (MUTE)

SP-PHONE indicator

- (CALL LOG)
 - You can access the caller list/redial list by pressing [CALL LOG].

- (CALL BLOCK)
- (B) (ANSWER ON/OFF) ANSWER ON/OFF indicator
- ([ERASE]
- ② [►■] (PLAY/STOP) Message indicator
- Desk stand/Wall mounting adaptor
 - The adaptor is a removable attachment for desk stand or wall mounting use (page 48).

■ Control type

A Soft keys

By pressing a soft key, you can select the feature shown directly above it on the display.

- Navigator key
- [▲], [▼], [◄◄], or [►►]: Scroll through various lists and items.
- VOL. (Volume: [▲] or [▼]): Adjust the receiver or speaker volume while talking.
- [I◄◄]/[►►١]: Repeat/skip messages during playback.

Display icons

Handset display items

Item	Meaning
Ψ	Within base unit range
7	Out of base unit range
•	The line is in use. When flashing: The call is put on hold. When flashing rapidly: An incoming call is now being received.
ECO	Eco mode is on. (page 10)
NR	Noise reduction is set. (page 16)
EQ	Equalizer is set. (page 16)
4	Speakerphone is on. (page 14)
Ø	Ringer volume is off. (page 29)
シ	Night mode is on. (page 33)
PRIV.	Privacy mode is on. (page 31)
Ð	Alarm is on. (page 32)
1	Handset number
	Battery level
·≯)	Blocked call (page 19)

Item	Meaning
BOOST	Clarity booster is on. (page 16)
→	Baby monitor is activated. The name/number displayed next to the icon indicates the monitoring unit. (page 33)
In use	Answering system is being used by another handset or the base unit.
Line in use	Someone is using the line.

Base unit display items

Item	Meaning				
•	The line is in use. When flashing: The call is put on hold. When flashing rapidly: An incoming call is now being received.				
Ø	Ringer volume is off. (page 29)				
シ	Night mode is on. (page 33) Privacy mode is on. (page 31)				
PRIV.					
60	"Greeting only" is selected. Caller messages are not recorded. (page 46)				
Š	Power backup mode is on. (page 9)				
<i>\</i> ≠ 3	Blocked call (page 19)				
In use	Answering system is being used by the handset.				
Line in use	Someone is using the line.				

Language settings

Display language

You can select either "English" or "Français" as the display language. The default setting is "English".

Handset / Base unit

- 1 [MENU]#110
- **2** (♣): Select the desired setting. → **(SAVE)**
- 3 Proceed with the operation for your unit. Handset: [OFF]

For assistance, visit www.panasonic.ca/english/support

Base unit: [EXIT]

Voice guidance language

You can select either "English" or "Français" as the voice guidance language of the Talking Call Display and answering system. The default setting is "English".

You can configure this setting using either the base unit or one of the handsets.

Handset / Base unit

- 1 [MENU]#112
- 2 (♣): Select the desired setting. → [SAVE]
- 3 Proceed with the operation for your unit. Handset: [OFF]

Handset: [OFF]
Base unit: [EXIT]

Date and time

You can configure this setting using either the base unit or one of the handsets.

Handset / Base unit

- 1 (MENU)#101
- **2** Enter the current month, date, and year by selecting 2 digits for each.

Example: July 12, 2015 **0 7 1 2 1 5**

- 3 [OK]
- 4 Enter the current hour and minute (12-hour clock format) by selecting 2 digits for each.

 Example: 9:30

 [0] [3] [0]
- 5 Proceed with the operation for your unit. Handset: 涵: Select "AM" or "PM". Base unit: [AM/PM]: Select "AM" or "PM".
- 6 [SAVE]
- 7 Proceed with the operation for your unit. Handset: [OFF]

Base unit: [EXIT]

Note:

 When English is selected as the display language, 12-hour clock format is used. When French is selected, 24-hour clock format is used.

Recording your greeting message

You can record your own greeting message instead of using a pre-recorded greeting message. See page 40 for details.

You can configure this setting using either the base unit or one of the handsets.

Handset / Base unit

- 1 [MENU]#302
- 2 (\d): "Yes" \rightarrow [SELECT]
- 3 Record a greeting message. → [STOP]
- Proceed with the operation for your unit.

Handset: [OFF]
Base unit: [EXIT]

Other settings

Dialing mode

If you cannot make calls, change this setting according to your telephone line service. The default setting is "Tone".

"Tone": For tone dial service.

"Pulse": For rotary/pulse dial service.

You can configure this setting using either the base unit or one of the handsets.

Handset / Base unit

- 1 (MENU)#120
- 2 (♣): Select the desired setting. → [SAVE]
- **3** Proceed with the operation for your unit.

Handset: [OFF]
Base unit: [EXIT]

Making/Answering Calls

Making calls

Using the handset

- 1 Lift the handset and dial the phone number.
 - To correct a digit, press [CLEAR].
- 2 []
- 3 When you finish talking, press [OFF] or place the handset on the charger.

Using the speakerphone

- 1 Dial the phone number and press [♣].
- 2 When you finish talking, press [OFF].

Note:

To switch back to the receiver, press [♣]/[♠].

Making a call using the redial list

The last 5 phone numbers dialed are stored in the redial list (each 48 digits max.).

- 1 [▶] REDIAL
- 2 (\$): Select the desired phone number.
- 3

Erasing a number in the redial list

- 1 [►] REDIAL
- 2 [♣]: Select the desired phone number. → [ERASE]
- **3** [♠]: "Yes" → [SELECT]
- 4 [OFF]

Using the base unit

- 1 Dial the phone number.
 - To correct a digit, press [CLEAR].
- 2 Lift the corded handset.
- **3** When you finish talking, place the corded handset on the cradle.

Note:

- You can also dial the phone number after lifting the corded handset.
- While on a call, you can switch from the base unit to the cordless handset as follows.
 The privacy mode must be off (page 31).
 Handset: Press [].

② Base unit: Place the corded handset on the cradle. When the speakerphone is used, press [�].

Using the speakerphone

- 1 During a conversation with the corded handset, press [♠] to turn on the speakerphone.
 - You can place the corded handset on the cradle.
 - Speak into the base unit microphone.
- 2 When you finish talking, press [♣].

Note:

• To switch to the receiver, lift the corded handset.

Making a call using the redial list

The last 10 phone numbers dialed are stored in the redial list (each 48 digits max.).

- 1 [REDIAL]
- 2 (♣): Select the desired phone number.
- 3 Lift the corded handset.

Note:

 In step 1, you can also access the redial list as follows:

[CALL LOG] \rightarrow [\updownarrow]: "Outgoing call" \rightarrow [SELECT]

Erasing a number in the redial list

- 1 [REDIAL]
- 2 [♣]: Select the desired phone number. → [ERASE]
- 3 [♣]: "Yes" → [SELECT]
- 4 [EXIT]

Adjusting the receiver or speaker volume

Handset / Base unit

Press (▲) or (▼) repeatedly while talking.

Pause (for PBX/long distance service users)

A pause is sometimes required when making calls using a PBX or long distance service. When storing a calling card access number and/or PIN in the phonebook, a pause is also needed (page 24).

For assistance, visit www.panasonic.ca/english/support

Example: If you need to dial the line access number "9" when making outside calls with a PBX:

Handset

- 1 $9 \rightarrow [A]$ (Pause)
- 2 Dial the phone number. \rightarrow [\uparrow]

Base unit

- 1 $9 \rightarrow [PAUSE]$
- 2 Dial the phone number.
- 3 Lift the corded handset.

Note for handset and base unit:

 A 3.5 second pause is inserted each time you press [A] (Pause) on the handset or [PAUSE] on the base unit.

Answering calls

Using the handset

- 1 Lift the handset and press (→) or (♠) when the unit rings.
- When you finish talking, press [OFF] or place the handset on the charger.

Any key answer: You can answer the call by pressing any dial key.

Auto talk: You can answer calls simply by lifting the handset (page 30).

Temporary ringer off: You can turn the ringer off temporarily by pressing $[\mathcal{A}]$.

Using the base unit

- 1 Lift the corded handset or press [♣] when the unit rings.
- 2 When you finish talking, place the corded handset on the cradle. When the speakerphone is used, press [♣].

Temporary ringer off: You can turn the ringer off temporarily by pressing [\(\mathcal{L} \)].

Adjusting the ringer volume

Handset / Base unit

Press [▲] or [▼] repeatedly to select the desired volume while ringing.

Useful features during a call

Hold

Handset

- 1 Press [MENU] during an outside call.
- 2 [♣]: "Hold" → [SELECT]
- 3 To release hold, press [].
 - Another handset user can take the call by pressing [].
 - The base unit user can take the call by lifting the corded handset.

Base unit

- 1 Press [HOLD] during an outside call.
 - If you are using the corded handset, you can place it on the cradle.
- 2 To release hold, lift the corded handset.
 - A handset user can take the call by pressing [].

Note for handset and base unit:

- While an outside call is on hold, the SP-PHONE indicator flashes.
- After holding for 10 minutes, the call is disconnected.

Mute

Handset / Base unit

- 1 Press [MUTE] during a call.
- 2 To return to the call, press [MUTE].

Note:

• **[MUTE]** is a soft key visible on the display during a call.

Flash

Handset / Base unit

[FLASH] allows you to use the special features of your host PBX such as transferring an extension call, or accessing optional telephone services.

Note:

• To change the flash time, see page 31.

Making/Answering Calls

For Call Waiting or Visual Call Waiting service users

To use Call Waiting or Visual Call Waiting, you must first subscribe with your phone service provider.

This feature allows you to receive calls while you are already talking on the phone. If you receive a call while on the phone, you will hear a Call Waiting tone.

If you subscribe to both Call Display and Visual Call Waiting services, the 2nd caller's information is displayed on the handset or base unit that is in use after you hear the Call Waiting tone

Handset / Base unit

- 1 Press [CALL WAIT] to answer the 2nd call.
- 2 To switch between calls, press [CALL WAIT].

Note:

 Please contact your phone service provider for details and availability of this service in your area.

Temporary tone dialing (for rotary/pulse service users)

Handset / Base unit

Press $\overline{\mathbb{X}}$ (TONE) before entering access numbers which require tone dialing.

Handset clarity booster

This feature can improve sound clarity when the handset is used in an area where there may be interference. During an outside call, this feature is turned on automatically when necessary.

 When this feature is turned on, E00ST is displayed.

Handset noise reduction

This feature allows you to hear the voice of the person you are talking to more clearly, by reducing the surrounding noise coming from the other party's telephone.

- 1 Press [MENU] while talking.
- 2 [♣]: "Noise reduction on" OF "Noise reduction off" → [SELECT]

Note:

- Depending on the environment where this handset is being used, this feature may not be effective.
- This feature is not available while using the speakerphone.

Handset equalizer

This feature clarifies the voice of the person you are talking to, producing a more natural-sounding voice that is easier to hear and understand.

- 1 Press [MENU] while talking.
- 2 $[\ \]$: "Equalizer" \rightarrow [SELECT]
- **3** [♠]: Select the desired setting.
- 4 Press [OK] to exit.

Note:

- Depending on the condition and quality of your telephone line, this feature may emphasize existing line noise. If it becomes difficult to hear, turn this feature off.
- This feature is not available while using the speakerphone.
- When both the "Equalizer" setting and noise reduction are activated, IR is shown on the display.

Call share

You can join an existing outside call.

Handset

To join the conversation, press [] when the other unit is on an outside call.

Base unit

To join the conversation, lift the corded handset when the handset is on an outside call.

Note for handset and base unit:

- A maximum of 3 parties (including 1 outside party) can join a conversation. (3-way conference)
- To prevent other users from joining your conversations with outside callers, turn privacy mode on (page 31).

Transferring calls, conference calls

Outside calls can be transferred or a conference call with an outside party can be made:

For assistance, visit www.panasonic.ca/english/support

- between 2 handsets
- between a handset and the base unit

Handset

- 1 During an outside call, press [MENU].
- 2 [♣]: "Intercom" → [SELECT]
- 4 Wait for the paged party to answer.
 - If the paged party does not answer, press
 [BACK] to return to the outside call.
- 5 To complete the transfer:

Press [OFF].

To establish a conference call:

[MENU] \rightarrow [$\$]: "Conference" \rightarrow [SELECT]

- To leave the conference, press [OFF]. The other 2 parties can continue the conversation.
- To put the outside call on hold: [MENU] →
 [\$]: "Hold" → [SELECT]
 To resume the conference: [MENU] →
 [\$]: "Conference" → [SELECT]
- To cancel the conference: [MENU] → [\$]:
 "stop conference" → [SELECT]
 You can continue the conversation with the outside caller.

Base unit

- 1 During an outside call, press [INTERCOM].
 - When 2 or more handsets are registered:
 - $\{ \}$: Select the desired unit. \rightarrow [SELECT]
 - To page all handsets, press or wait for a few seconds.
- **2** Wait for the paged party to answer.
 - If paged party does not answer, press
 [INTERCOM] to return to the outside call.
- 3 To complete the transfer:

Place the corded handset on the cradle.

 The outside call is being routed to the handset.

To establish a conference call:

Press [CONF].

- To leave the conference, place the corded handset on the cradle. The other 2 parties can continue the conversation.
- To put the outside call on hold, press [HOLD]. To resume the conference, press [CONF].

Intercom

Intercom

Intercom calls can be made:

- between handsets
- between a handset and the base unit

Note:

- When paging unit(s), the paged unit(s) beeps for 1 minute.
- If you receive an outside call while talking on the intercom, the interrupt tone sounds.
 - Handset: To finish intercom, press [OFF].
 To answer the call, press [].
 - Base unit: To finish intercom, place the corded handset on the cradle. If the speakerphone is used, press [♣]. To answer the call, lift the corded handset. If the speakerphone is used, press [♣].

Making an intercom call

Handset

- 1 [MENU] → [♣]: "Intercom" → [SELECT]
- 2 (♣): Select the desired unit. → [SELECT]
- 3 When you finish talking, press [OFF].

Note:

 You can also use the [INTERCOM] soft key, if displayed, to make intercom calls.

Base unit

1 Press [INTERCOM].

When 2 or more handsets are registered:

- $\{ \}$: Select the desired unit. \rightarrow [SELECT]
- To page all handsets, press or wait for a few seconds.
- Lift the corded handset if needed.
- 2 When you finish talking, press [♣] or place the corded handset on the cradle.

Answering an intercom call

Handset

- 1 Press () to answer the page.
- 2 When you finish talking, press [OFF].

Base unit

1 Press [♣] or lift the corded handset to answer the page.

When you finish talking, press [*] or place the corded handset on the cradle.

Turning auto intercom on/off

This feature allows the handset and base unit to answer intercom calls automatically when it is called. You do not need to press [], lift the corded handset, or press []. When this feature is set to "on", the monitoring handset or base unit for the baby monitor feature (page 35) will also answer baby monitor calls automatically. The default setting is "off".

Handset / Base unit

- 1 (MENU)#273
- 2 (♣): Select the desired setting. → [SAVE]
- 3 Proceed with the operation for your unit.

Handset: [OFF]
Base unit: [EXIT]

For assistance, visit www.panasonic.ca/english/support

Using the [CALL BLOCK] button

You can press the **[CALL BLOCK]** button in the following situations to disconnect the current call and add a phone number to the call block list:

- when an incoming call is being received
- when an incoming call is being recorded by the answering system
- when talking on an outside call

Once a phone number has been added to the call block list, the unit will block calls from that phone number in the future.

Handset / Base unit

- Press [CALL BLOCK] under the situations shown above.
- 2 Confirm the call block number and press [YES].
 - The call block number is stored in the call block list, "Caller blocked" is displayed, and then the call is disconnected.

Note:

- If the call has no phone number, the call is blocked but it is not stored in the call block list.
- The call block feature is not available for intercom calls or calls received by Call Waiting.
- Blocked calls are logged in the caller list.

Storing unwanted callers

The unit can block calls by storing the desired items in the call block list beforehand (Call Display subscribers only).

- "Block a single number": The unit blocks calls from specific phone numbers stored in the call block list.
- "Block range of numbers": The unit blocks calls that begin with a number stored in the call block list, such as a toll-free phone number prefix or certain area codes.
- "Block unknown CID": The unit blocks calls that have no phone number.

Single phone numbers and ranges of numbers can be stored in the call block list up to 250 items in total.

Blocking unwanted callers:

When a call is received, the unit rings briefly*1 while caller information is being received.

If the caller's phone number matches an entry in the call block list, the unit emits no sound to the caller, and disconnects the call.

*1 If you do not want this one ring to sound, select "No" in "Setting not to ring once for blocked call" (page 20).

Storing a single phone number

Important:

 We recommend storing 10 digits (including the area code). If only 7 digits are stored, all numbers that have the same last 7 digits will be blocked.

Adding call blocked numbers from the caller list

Handset

- 1 [▼] CID
- 2 (\$): Select the entry to be blocked.
 - To edit the number: [MENU] → [\$]:
 "Edit" → [SELECT]
 Press [EDIT] repeatedly until the phone number is shown in the 10-digit format. →
 [SAVE] → [\$]: "Call block" →
 [SELECT] → Go to step 4.
- 3 [CALL BLOCK]
- 4 [♣]: "Yes" → [SELECT]
- 5 Edit the phone number if necessary (24 digits max.).
- 6 [SAVE] \rightarrow [OFF]

Base unit

- 1 [CID]
- [\$]: Select the entry to be blocked.
 - To edit the number: Press [EDIT] repeatedly until the phone number is shown in the 10-digit format.
- 3 [CALL BLOCK]
- 4 [♣]: "Yes" → [SELECT]
- 5 Edit the phone number if necessary (24 digits max)
- 6 [SAVE] \rightarrow [EXIT]

Adding call blocked numbers manually

Handset

1 [CALL BLOCK]

Call Block

- 2 [♣]: "Block a single number" →
 [SELECT]
- 3 [MENU] \rightarrow [\$]: "Add" \rightarrow [SELECT]
- 4 Enter the phone number (24 digits max.).
- 5 [SAVE] \rightarrow [OFF]

Base unit

- 1 [CALL BLOCK]
- 3 Enter the phone number (24 digits max.).
- 4 [SAVE] \rightarrow [EXIT]

Storing a range of number

Handset

- 1 [CALL BLOCK]
- 2 [♣]: "Block range of numbers" →
 [SELECT]
- 3 [MENU] \rightarrow [\updownarrow]: "Add" \rightarrow [SELECT]
- 4 Enter the desired number (2-8 digits).
- 5 [SAVE] \rightarrow [OFF]

Base unit

- 1 [CALL BLOCK]
- 2 [♣]: "Block range of numbers" →
 [SELECT]
- 3 [ADD]
- 4 Enter the desired number (2-8 digits).
- 5 [SAVE] \rightarrow [EXIT]

Blocking incoming calls that have no phone number

You can block calls when no phone number is provided, such as private callers or out of area calls

Handset / Base unit

- 1 [CALL BLOCK]
- 2 $[^{\blacktriangle}]$: "Block unknown CID" \rightarrow [SELECT]
- 4 Proceed with the operation for your unit. Handset: [OFF] Base unit: [EXIT]

Setting not to ring once for blocked call

If you do not want the unit to sound one ring for calls from phone numbers stored in the call block list, select "no". The default setting is "Yes".

Handset / Base unit

- 1 [CALL BLOCK]
- 3 ($\ \$): Select the desired setting. \rightarrow [SAVE]
- 4 Proceed with the operation for your unit. Handset: [OFF] Base unit: [EXIT]

Viewing/editing/erasing call block numbers

Handset

- 1 [CALL BLOCK]
- 2 [♣]: "Block a single number" Or "Block range of numbers" → [SELECT]
- **3** [♠]: Select the desired entry.
 - After viewing, press [OFF] to exit.
- 4 To edit a number:

[EDIT] \rightarrow Edit the number. \rightarrow **[SAVE]** \rightarrow **[OFF]**

To erase a number: [ERASE] \rightarrow [\updownarrow]: "Yes" \rightarrow [SELECT] \rightarrow [OFF]

Base unit

- 1 [CALL BLOCK]
- 2 [♣]: "Block a single number" Or "Block range of numbers" → [SELECT]
- 3 (*): Select the desired entry.
 - After viewing, press [EXIT] to exit.
- 4 To edit a number:

[EDIT] \rightarrow Edit the number. \rightarrow **[SAVE]** \rightarrow **[EXIT]**

To erase a number:

[ERASE] → [\diamondsuit]: "Yes" → [SELECT] → [EXIT]

Note:

 When editing, press the desired dial key to add digits and press [CLEAR] to erase digits.

Erasing all call block numbers

Handset / Base unit

- 1 [CALL BLOCK]
- 2 (♣): "Block a single number" Or "Block range of numbers" → [SELECT]
- 3 Proceed with the operation for your unit. Handset: [MENU] → [♠]: "Erase all" → [SELECT] Base unit: [ERASE]
- **4** [♣]: "Yes" → [SELECT]
- **5** [♠]: "Yes" → [SELECT]
- 6 Proceed with the operation for your unit.

Handset: [OFF]
Base unit: [EXIT]

Phonebook

Phonebook

You can add 100 names (16 characters max.) and phone numbers (24 digits max.) to the phonebook, and assign each phonebook entry to the desired group (page 23).

Important:

 All entries can be shared by the base unit and any registered handset.

Adding phonebook entries

Handset / Base unit

- 1 Proceed with the operation for your unit. Handset: [◄] □ → [MENU] Base unit: [□] → [MENU]
- 2 [♣]: "Add new entry" → [SELECT]
- 3 Enter the party's name. \rightarrow [OK]
- **4** Enter the party's phone number. → **[OK]**
- 5 [♠]: Select the desired group. → [SELECT] 2 times
- 6 Proceed with the operation for your unit. Handset: [OFF] Base unit: [EXIT]

Note for base unit:

You can also add entries as follows:
 Press (□□). → (ADD) → Go to step 3.

Character table for entering names

While entering characters, you can switch between uppercase and lowercase by pressing \times (A \rightarrow a).

Key	Cha	racte	r				
1	&	,	()	*	,	
	_		/	1			
2	Α	В	С	2			
	а	b	С	2			
3	D	Е	F	3			
	d	е	f	3			
4	G	Н	I	4			
	g	h	i	4			
5	J	K	L	5			
	j	k	I	5			

Key	Cha	racte	r			
6	М	Ν	0	6		
	m	n	0	6		
7	Р	Q	R	S	7	
	р	q	r	s	7	
8	Т	U	V	8		
	t	u	٧	8		
9	W	Χ	Υ	Z	9	
	W	Х	У	Z	9	
0]	0				
#	#					

 To enter another character that is located on the same dial key:

Handset: Press [▶] to move the cursor to the next space.

Base unit: Press [►►I] to move the cursor to the next space.

- If you do not press any dial key within 2 seconds after entering a character, the character is fixed and the cursor moves to the next space.
- _ in the above table represents a single space.

Erasing the character or number

Handset: Press (\blacktriangleleft) or (\blacktriangleright). \rightarrow [CLEAR] Base unit: Press (\blacktriangleleft) or (\blacktriangleright). \rightarrow [CLEAR]

 Press and hold [CLEAR] to erase all characters or numbers.

Storing a redial list number to the phonebook

Phone numbers of up to 24 digits can be stored in the phonebook.

Handset / Base unit

- 1 Proceed with the operation for your unit. Handset: [>] REDIAL Base unit: [REDIAL]
- 2 [♠]: Select the desired phone number. → [SAVE]
- **3** To store the name, continue from step 3, "Editing entries", page 23.

Storing caller information to the phonebook

Handset

1 [▼] CID

- 2 [♣]: Select the desired entry. → [MENU]
 - To edit the number: [♣]: "Edit" → [SELECT]

Press **[EDIT]** repeatedly until the phone number is shown in the desired format. And then, press **[SAVE]**. Go to step 4.

- 3 [♣]: "Save caller ID" → [SELECT]
- 4 [♣]: "Phonebook" → [SELECT]
- **5** Continue from step 3, "Editing entries", page 23.

Base unit

- 1 [CID]
- 2 (\$): Select the desired entry.
 - To edit the number, press [EDIT] repeatedly until the phone number is shown in the desired format.
- 3 [SAVE]
- 4 [♣]: "Phonebook" → [SELECT]
- 5 Continue from step 3, "Editing entries", page 23.

Groups

Groups can help you find entries in the phonebook quickly and easily. You can change the names of groups assigned for phonebook entries ("Friends", "Family", etc.). By assigning different ringer tones for different groups of callers, you can identify who is calling (ringer ID), if you have subscribed to Call Display service.

Changing group names/setting ringer ID

The default group name is "Group 1" to "Group 9".

Handset / Base unit

- 1 Proceed with the operation for your unit. Handset: [◄] □□ → [MENU] Base unit: [□□] → [MENU]
- 2 [♣]: "Group" → [SELECT]
- **3** [♠]: Select the desired group. → [SELECT]
- 4 To change group names

[$\$]: "Group name" → [SELECT] → Edit the name (10 characters max.). → [SAVE]

5 To set group ringer tone (handset) [♣]: Select the current setting of the group ringer tone. → [SELECT] → [♣]: Select the desired ringer tone. → [SAVE] 6 Proceed with the operation for your unit. Handset: [OFF]

Base unit: [EXIT]

Finding and calling from a phonebook entry

Handset / Base unit

1 Proceed with the operation for your unit.

Handset: [◄] □☐
Base unit: [□☐]

2 To scroll through all entries

[\$]: Select the desired entry.

To search by first character

- ① Press the dial key (o o o, o m, o m, o o, which contains the character you are searching for (page 22).
- ② [♣]: Scroll through the phonebook if necessary.

To search by group

- ① [GROUP]
- ② [♣]: Select the desired group. → [SELECT]
- ③ [♣]: Scroll through the phonebook if necessary.
- 3 Proceed with the operation for your unit. Handset: [>]

Base unit: Lift the corded handset.

Editing entries

Handset

- **1** Find the desired entry (page 23).
- 2 $[MENU] \rightarrow [\]$: "Edit" $\rightarrow [SELECT]$
- 3 Edit the name if necessary. \rightarrow [OK]
- 4 Edit the phone number if necessary. → [OK]
- 5 [♠]: Select the desired group (page 23). → [SELECT] 2 times → [OFF]

Base unit

- 1 Find the desired entry (page 23).
- 2 [EDIT]
- **3** Edit the name if necessary. \rightarrow [OK]
- **4** Edit the phone number if necessary. \rightarrow [OK]
- 5 [♣]: Select the desired group (page 23). → [SELECT] 2 times → [EXIT]

Phonebook

Erasing entries

Erasing an entry

Handset

- 1 Find the desired entry (page 23).
- 2 [MENU] \rightarrow [\diamondsuit]: "Erase" \rightarrow [SELECT]

Base unit

- 1 Find the desired entry (page 23).
- 2 [ERASE] \rightarrow [$\stackrel{\bullet}{\mathbf{v}}$]: "Yes" \rightarrow [SELECT] \rightarrow [EXIT]

Erasing all entries

Handset / Base unit

- 1 Proceed with the operation for your unit. Handset: [◄] □□ → [MENU] Base unit: [□□] → [MENU]
- 2 (♣): "Erase all" → [SELECT]
- 3 [♣]: "Yes" → [SELECT]
- 4 [♣]: "Yes" → [SELECT]
- 5 Proceed with the operation for your unit. Handset: [OFF] Base unit: [EXIT]

Chain dial

This feature allows you to dial phone numbers in the phonebook while you are on a call. This feature can be used, for example, to dial a calling card access number or bank account PIN that you have stored in the phonebook, without having to dial manually.

Handset / Base unit

- Proceed with the operation for your unit.
 Handset: During an outside call, press [◄]
 - Base unit: During an outside call, press [].
- 2 (\$): Select the desired entry.
- 3 Press [CALL] to dial the number.

Note:

 When storing a calling card access number and your PIN in the phonebook as one phonebook entry, press [A] (Pause) on the handset or [PAUSE] on the base unit to add pauses after the number and PIN as necessary (page 14). • If you have rotary/pulse service, you need to press ※ (TONE) before pressing [◄] ☐ on the handset or [☐] on the base unit in step 1 to change the dialing mode temporarily to tone. When adding entries to the phonebook, we recommend adding ※ (TONE) to the beginning of phone numbers you wish to chain dial (page 22).

Speed dial

You can store phone numbers to the base unit and handset separately:

- Handset: up to 9 entries.
- Base unit: up to 9 entries.

Adding phone numbers to speed dial keys

Handset

You can assign 1 phone number to each of the dial keys (1 to 9).

- By entering phone numbers:
 - 1 Press and hold the desired speed dial key (1 to 9). → [ADD]
 - 2 [♣]: "Manual" → [SELECT]
 - 3 Enter the party's name (16 characters max.). → [OK]
 - 4 Enter the party's phone number (24 digits max.). → [OK]
 - 5 [SELECT] \rightarrow [OFF]
- From the phonebook:
 - 1 Press and hold the desired speed dial key (1 to 9). → [ADD]
 - 2 (♣): "Phonebook" → [SELECT]
 - **3** (♣): Select the desired entry.
 - 4 [SAVE] \rightarrow [OFF]

Base unit

- By entering phone numbers:
 - 1 [SPEED DIAL]
 - 2 (♣): Select the desired speed dial key. → [EDIT]
 - 3 Enter the party's name (16 characters max.). → [OK]

- 4 Enter the party's phone number (24 digits max.). → [OK]
- 5 [SELECT] \rightarrow [EXIT]

■ From the phonebook:

- 1 [SPEED DIAL]
- 2 [♣]: Select the desired speed dial key. →
- **3** [♠]: Select the desired entry.
- 4 $[SAVE] \rightarrow [EXIT]$

Note for handset and base unit:

 If you edit a phonebook entry which is assigned to a speed dial key, the edited entry does not transfer to the speed dial key.

Note for base unit:

- You can also select the desired entry as follows:
 - Press and hold the desired speed dial key (1 to 9).
 - Press [SPEED DIAL] and then enter the desired speed dial key (1 to 9).

Editing an entry

Handset

- 1 Press and hold the desired speed dial key (1 to 9). → [MENU]
- **2** [♠]: "Edit" → [SELECT]
- **3** Edit the name if necessary. \rightarrow **[OK]**
- **4** Edit the phone number if necessary. → **[OK]**
- 5 [SELECT] \rightarrow [OFF]

Base unit

- 1 [SPEED DIAL]
- 2 (♣): Select the desired entry. → [DETAIL]
- 3 [EDIT]
- 4 Edit the name if necessary. → [OK]
- **5** Edit the phone number if necessary. \rightarrow **[OK]**
- 6 [SELECT] \rightarrow [EXIT]

Erasing an entry

Handset

- 1 Press and hold the desired speed dial key (1 to ⑨). → [MENU]
- 2 [♣]: "Erase" → [SELECT]

- 3 [♣]: "Yes" → [SELECT]
- 4 [OFF]

Base unit

- 1 [SPEED DIAL]
- 2 (♣): Select the desired entry. → [DETAIL]
- 3 [ERASE]
- 4 [♠]: "Yes" → [SELECT]
- 5 [EXIT]

Viewing an entry/Making a call

Handset

- 1 Press and hold the desired speed dial key (1 to 9).
- 2 To make a call, press [].

Base unit

- 1 [SPEED DIAL]
- 2 (\$): Select the desired entry.
- 3 Lift the corded handset.

Note for base unit:

 You can dial phone numbers in the speed dial while you are on a call.

One-touch dial buttons

You can store phone numbers or extension numbers to the base unit's one-touch dial buttons (1 to 3).

- phone numbers for outside calls
- extension numbers for handsets

Note:

 You can transfer a call to a handset. While you are on an outside call, press the one-touch dial button with an extension number stored. The line is put on hold and the base unit pages the handset. After the handset answers the page, place the corded handset on the cradle to complete the transfer.

Phonebook

Adding phone numbers for outside calls

Base unit

■ By entering phone numbers:

- 1 Press and hold the desired one-touch dial button (1 to 3). → [EDIT]
- 2 Enter the party's name (16 characters max.). → [OK]
- 3 Enter the party's phone number (24 digits max.). → [OK]
- 4 [SELECT] \rightarrow [EXIT]

■ From the phonebook:

- 1 Press and hold the desired one-touch dial button (1 to 3).
- 2 [1]
- 3 (\$): Select the desired entry.
- 4 [SAVE] → [EXIT]

Note:

 If you edit a phonebook entry which is assigned to a one-touch dial button, the edited entry does not transfer to the one-touch dial button.

Adding extension numbers for handsets

Base unit

- 1 Press and hold the desired one-touch dial button (1 to 3). → [EDIT]
- 2 Press (INT).
- 3 [♣]: Select the desired unit. → [SELECT] 2 times → [EXIT]

Viewing/editing/erasing an entry

Base unit

- Press and hold the desired one-touch dial button (1 to 3).
 - After viewing, press [EXIT] to exit.
- 2 To edit an entry

[EDIT] → Edit the name if necessary. →
[OK] → Edit the phone number if necessary.
→ [OK] → [SELECT] → [EXIT]
To erase an entry

[ERASE] \rightarrow [$^{↑}$]: "Yes" \rightarrow [SELECT] \rightarrow [EXIT]

Making a call

Base unit

Press the desired one-touch dial button (1 to 3), then lift the corded handset.

Note:

 You can dial phone numbers in the one-touch dial while you are on a call.

Menu list

To access the features, there are 2 methods.

Handset / Base unit

- Scrolling through the display menus
 - 1 [MENU]
 - **2** Press [V] or [A] to select the desired main menu. \rightarrow [SELECT]
 - 3 Press [v] or [A] to select the desired item from the next sub-menus. → [SELECT]
 - 4 Press (▼) or (▲) to select the desired setting. → [SAVE]
- Using the direct command code
 - **1 [MENU]** → Enter the desired code.
 - Example: Press [MENU]#101.
 - 2 Select the desired setting. → [SAVE]

Note:

- The unit column shows the unit(s) that can be used to program the item.
 - ?: Only the handset can program the item.
 - ∴ Only the base unit can program the item.
 - **⊘**/**△**: Both the handset and base unit can program the item.
- To exit the operation, press [OFF] on the handset or [EXIT] on the base unit.
- In the following table, < > indicates the default settings.
- In the following table, if indicates the reference page number.
- Display menu order and sub-menu may vary depending on your model.

Display menu tree and direct command code table

Main menu: III "Phonebook"

Operation	Code	Unit	G
Viewing the phonebook entry.	#280		23

Main menu: →) "Caller list"

Operation	Code	Unit	G
Viewing the caller list.	#213	8 1 1	38

Main menu:

Handset: ☑ "Answering device"

Base unit: ☑ F "Answering device"

Sub-menu 1	Sub-menu 2	Settings	Code	Unit	G
Play new message	_	_	#323	P	41
Play all message	_	_	#324	Ø	41
Erase all message*1	-	-	#325	₽	42

Sub-menu 1	Sub-menu 2	Settings	Code	Unit	G
Greeting	Record greeting*1	_	#302	8 18 -	40
	Check greeting	_	#303	811	41
	Pre-recorded*1 (Reset to pre-recorded greeting)	_	#304	\$14 4	40
New message alert*1	Outgoing call - On/Off	On <off></off>	#338	Ø14 5	42
	Outgoing call - Notification to	_			
	Outgoing call - Remote code	Activate <inactivate></inactivate>			
	Base unit beep	On <off></off>	#339		42
Settings	Ring count*1	2-7 rings <4 rings> Toll saver	#211	8 18 8	45
	Recording time*1	1 min <3 min> Greeting only*2	#305	\$14 3	46
	Remote code*1	<111>	#306	₽\ 6 □	44
	Screen call	<on> Off</on>	#310	Ø14 5	45
Answer on*1	_	_	#327	P	40
Answer off*1	_	_	#328	8	40

Main menu: № "Voicemail access"

Operation	Code	Unit	G
Listening to voicemail messages.	#330	₽ 8□	47

Main menu: (/) "Intercom"

Operation	Code	Unit	G	
Paging the desired unit.	#274	P	18	

Main menu: ⊕ "Set date & time"

Sub-menu 1	Sub-menu 2	Settings	Code	Unit	Ġ
Date and time*1	_	_	#101	₽	13
Memo alarm	Alarm1-3	Once Daily Weekly <off></off>	#720	₽	32
Time adjustment*1,*3	_	<pre><caller auto="" id=""> Manual</caller></pre>	#226	₽	-

For assistance, visit www.panasonic.ca/english/support

Main menu: ♣♣ "Speed dial"

Operation	Code	Unit	G
Viewing the speed dial entry.	#261	₽ 4□	24

Main menu: **≠** "Settings"

Sub-menu 1	Sub-menu 2	Settings	Code	Unit	G
Ring adjustments	Ringer volume	Off-6 <6>	#160		_
	Ringer tone*4,*5	<tone 1=""></tone>	#161	P	_
	Night mode - On/Off	On <off></off>	#238	Ø18 =	33
	Night mode - Start/End	<11:00 PM/06:00 AM>	#237		33
	Night mode - Select group	Group 1-9	#241	Ø18 =	33
Set date & time	Date and time*1	_	#101	Ø18 =	13
	Memo alarm - Alarm1-3	Once Daily Weekly <off></off>	#720	P	32
	Time adjustment*1,*3	<caller auto="" id=""></caller>	#226	8 1 1	-
Talking caller ID*6 Talking Caller ID*7 (Talking Call Display)	_	Handset: <on> Off Base unit:*1 On <off></off></on>	#162	\$14 5	37
Key detector	Change name*1	Detector1	#6561	<i>Q</i>	_
setting ^{*8} - 1:Add new		Detector2*10	#6562 *10	4	
device		Detector3*10	#6563 *10	4	
(for Detector1)*9		Detector4*10	#6564 *10	8	
- 2:Add new device	Registration	_	#6571	8	_
(for Detector2)			#6572 *10	8	
- 3:Add new device			#6573 *10	P	
(for Detector3)			#6574 *10	8	
- 4:Add new	Deregistration	_	#6581	8	_
device (for Detector4)			#6582 *10	₽	
(10) Decectora)			#6583 *10	₽	
			#6584 *10	Ø	

Sub-menu 1	Sub-menu 2	Settings	Code	Unit	G
Call block*1	Block a single number	_	#217	&1 4	19
	Block range of numbers	_		8 1 63	20
	Block unknown CID (CID: Call Display)	Block <unblock></unblock>	#240	&18 =	20
	One ring for blocked call	<yes></yes>	#173	Ø18 =	20
One-touch dial	-	_	#247	<i>1</i>	25
Speed dial	_	_	#261	₽\ \$ □	24
Record greeting*1	_	_	#302	Ø18 □	40
Voicemail	Save VM access#*1,*6 (VM: Voicemail) Save Voicemail access#*1,*7	-	#331	₽1 8 □	47
	VM tone detect*1	<on> Off</on>	#332	811	47
LCD contrast (Display contrast)	-	Handset: Level 1-4 <2> Base unit: Level 1-6 <3>	#145	\$1 4	_
Handset name	_	-	#104	Ø	35
Display name	-	On <off></off>	#105	₽	35
Auto intercom	_	On <off></off>	#273	\$1 4	18
Key tone	-	<on> Off</on>	#165	8	-
Auto talk*11	_	On <off></off>	#200	8	15

Sub-menu 1	Sub-menu 2	Settings	Code	Unit	G
Set tel line*1	Set dial mode	Pulse <tone></tone>	#120	8 1 1	13
	Set flash time*12	900 ms <700 ms> 600 ms 400 ms 300 ms 250 ms 200 ms 160 ms 110 ms 100 ms 90 ms 80 ms	#121	\$14 5	15
	Set line mode*13	A 	#122	Ø18 =	-
	C. WTG options*1 (Call Waiting Deluxe options)	On <off></off>	#215	\$1 4	37
Privacy mode*1	-	On <off></off>	#194	&14 <u>4</u>	16
Registration	Register handset	_	#130	4	36
	Deregistration*2	_	#131	₽	36
Deregistration*2	_	_	#131	<i>4</i> 5	36
Battery saving mode	_	On <off></off>	#150	42	10
Change language	Display	<english> Français</english>	#110	811	12
	Voice prompt*1	<english> Français</english>	#112	8 1 1	13

Main menu: ? "Customer support"

Operation	Code	Unit	G
Displaying customer support Web address.	#680	₽ 4□	_

Main menu: (3) "Baby monitor"

Sub-menu 1	Sub-menu 2	Settings	Code	Unit	Ġ
On/Off	_	On <off></off>	#268	₽	34
Sensitivity level	-	Low <middle> High</middle>	#269	Ø	35

Main menu: (2) "Key detector"*8

Sub-menu 1	Sub-menu 2	Settings	Code	Unit	G
Search	_	_	#655	₽ .	_
Battery check	_	_			

- *1 If you program these settings using one of the units, you do not need to program the same item using another unit.
- *2 This menu is not displayed when scrolling through the display menus. It is only available in direct command code.
- *3 This feature allows the unit to automatically adjust the date and time each time caller information including date and time is received.
 - To turn this feature on, select "Caller ID auto". To turn this feature off, select "Manual". (Call Display subscribers only)
 - To use this feature, set the date and time first (page 13).
- *4 The preset melodies in this product ("Tone 3" "Melody 10") are used with permission of © 2009 Copyrights Vision Inc.
- *5 If you subscribe to a distinctive ring service, select a tone (tone 1 or 2). If you select a melody, you cannot distinguish lines by their ringers.
- *6 Handset
- *7 Base unit
- *8 This setting is available when you have the key detector (KX-TGA20). Read the installation manual for more information on the key detector.
- *9 For models with supplied key detectors, the display shows "1:Detector1".
- *10 If you register 2 or more key detectors.
- *11 If you subscribe to a Call Display service and want to view the caller's information after lifting up the handset to answer a call, turn off this feature.
- *12 The flash time depends on your telephone exchange or host PBX. Contact your PBX supplier if necessary.
- *13 Generally, the line mode setting should not be changed. This setting automatically maintains receiver volume at the proper level depending on the current telephone line condition. Set the line mode to "a" if telephone line condition is not good.

Alarm

An alarm sounds at the set time for 1 minute and is repeated 5 times at 5 minute intervals (snooze function). A text memo can also be displayed for the alarm. A total of 3 separate alarm times can be programmed for each handset. You can set one of 3 different alarm options (once, daily, or weekly) for each alarm time.

Important:

 Make sure the unit's date and time setting is correct (page 13).

Handset

- 1 [MENU]#720
- 2 (♣): Select the desired alarm. → [SELECT]

3 [♣]: Select the desired alarm option. → [SELECT]

"Off"	Turns alarm off. Go to step 10.
"Once"	An alarm sounds once at the set time.
"Daily"	An alarm sounds daily at the set time. Go to step 5.
"Weekly"	Alarm sounds weekly at the set time(s).

- 4 Proceed with the operation according to your selection in step 3.
 - Once:

Enter the desired month and date. \rightarrow [OK]

■ Weekly:

 $\{\$]: Select the desired day of the week and press $\{SELECT\}$. $\rightarrow \{OK\}$

- 5 Set the desired time.
- 6 ⊞: Select "AM" or "PM". \rightarrow [OK]
- 7 Enter a text memo (10 characters max.). → [OK]
- 8 [♣]: Select the desired alarm tone. → [SELECT]
 - We recommend selecting a different ringer tone from the one used for outside calls.
- 9 [♣]: Select the desired snooze setting. → [SAVE]
- 10 [SELECT] \rightarrow [OFF]

Note:

- Press [STOP] to stop the alarm completely.
- When the handset is in use, the alarm will not sound until the handset is in standby mode.
- Press any dial key or [SNOOZE] to stop the sound but keep the snooze function activated.
- If you want to make an outside call when the snooze function is activated, please stop the snooze function before making the call.

Night mode

Night mode allows you to select a period of time during which the handset and/or base unit will not ring for outside calls. This feature is useful for time periods when you do not want to be disturbed, for example, while sleeping. Night mode can be set for each unit.

Using the phonebook's group feature (page 23), you can also select groups of callers whose calls override night mode and ring the unit (Call Display subscribers only).

Important:

- Make sure the unit's date and time setting is correct (page 13).
- If you have set the alarm, the alarm sounds even if the night mode is turned on.

Turning night mode on/off

Handset

- 1 [MENU]#238
- 2 (♦): Select the desired setting. → [SAVE]
 If you select "off", press [OFF] to exit.

- 3 Enter the desired hour and minute you wish to start this feature.
- 4 \times : Select "AM" or "PM". \rightarrow [OK]
- 5 Enter the desired hour and minute you wish to end this feature.
- 6 ★: Select "AM" or "PM".
- 7 $[SAVE] \rightarrow [OFF]$

Base unit

- 1 [MENU]#238
- 2 (♠): Select the desired setting. → [SAVE]

 If you select "off", press [EXIT] to exit.
- 3 Enter the desired hour and minute you wish to start this feature.
- 4 [AM/PM]: Select "AM" or "PM". → [OK]
- 5 Enter the desired hour and minute you wish to end this feature.
- 6 [AM/PM]: Select "AM" or "PM".
- 7 [SAVE] \rightarrow [EXIT]

Changing the start and end time

Handset / Base unit

- 1 [MENU]#237
- 2 Continue from step 3 for handset or step 3 for base unit, "Turning night mode on/off", page 33.

Selecting groups to bypass night mode

Handset / Base unit

- 1 [MENU]#241
- 2 (♣): Select the desired group. → [SELECT]
 - "✓" is displayed next to the selected group numbers.
 - To cancel the selected group:
 - [♣]: Select the group. → Press [SELECT] again. "✓" disappears.
- 3 [SAVE]
- **4** Proceed with the operation for your unit.

Handset: [OFF]
Base unit: [EXIT]

Baby monitor

This feature allows you to listen in on a room where another handset is located, allowing you to easily monitor from different areas of the house or

place. The monitored handset (placed in a baby's room, for example) will automatically call the monitoring handset, base unit, or the phone number stored when it detects sound.

Important:

- You should perform a test run of the baby monitor procedure to ensure that the baby monitor feature is set correctly. For example, test its sensitivity. Check the connection if you are diverting the baby monitor to an outside line.
- This feature should not be used as a substitute for a medical or caregiver's supervision. It is the caregiver's responsibility to stay close enough to handle any eventuality.

Note:

- If the unit is connected to a PBX system, you cannot set the baby monitor.
- During the monitoring mode, battery consumption is faster than usual. We recommend leaving the monitored handset on charger.
- The monitored handset never rings while it is being monitored. If the base unit is placed near the monitored handset, we recommend turning off the base unit ringer volume (page 29).

Setting the baby monitor

Perform the setting operation with the handset to be monitored (for example, the handset placed in a baby's room).

To monitor with a unit

The internal baby monitor feature is available:

- between handsets
- between a handset and the base unit

Handset

- 1 (MENU)#268
- 2 ($\ \$): "on" \rightarrow [SELECT]
- 3 [♣]: Select the desired unit's number to monitor with. → [SAVE]
 - "Baby monitor" will be displayed.
 - The registered unit's name/number is displayed.

Note:

34

 When this feature is on, another handset or the base unit can hear the monitored handset by making an intercom call.

To monitor from an outside line

If you enable this feature, the unit will call a pre-programmed phone number when the handset detects sound. After you answer the call, you can listen in on the room where the handset is located.

Handset

- From the phonebook:
 - 1 [MENU]#268

 - 3 (♣): Select "Outgoing call" to monitor from an outside line. → [EDIT] → [ADD]
 - 4 (♣): "Phonebook" → [SELECT]
 - 5 [♣]: Select the phonebook entry. → [SAVE]
 "Baby monitor" will be displayed.

Note:

- If you edit a phonebook entry which is assigned for monitoring, the edited entry does not transfer to the monitor.
- By entering phone numbers:
 - 1 [MENU]#268

 - 3 (♣): Select "Outgoing call" to monitor from an outside line. → [EDIT] → [ADD]
 - 4 (♣): "Manual" → [SELECT]
 - **5** Enter the desired name. \rightarrow **[OK]**
 - 6 Enter the desired number. → [OK] → [SELECT]
 - "Baby monitor" will be displayed.

Note:

The registered name/number is displayed.

Turning off the baby monitor

The monitored handset cannot be used while baby monitor is set to "on".

Handset

- Press [MENU] on the handset being monitored.
- 2 [♣]: "On/Off" → [SELECT]

Editing an outside monitoring number

Handset

- Press [MENU] on the handset being monitored.
- 2 [♣]: "On/Off" → [SELECT]
- **4** (♣): Select the outside line. → **[EDIT]**
- 5 [MENU] \rightarrow [\updownarrow]: "Edit" \rightarrow [SELECT]
- 6 Edit the name if necessary. → [OK]
- 7 Edit the phone number if necessary. → [OK] → [SELECT]

Erasing an outside monitoring number

Handset

- Press [MENU] on the handset being monitored.
- 2 (♣): "On/Off" → [SELECT]
- **4** (♣): Select the outside line. → **[EDIT]**
- 5 [MENU] \rightarrow [\updownarrow]: "Erase" \rightarrow [SELECT]
- 6 (♣): "Yes" → [SELECT] → [OFF]

Baby monitor sensitivity

You can adjust the sensitivity of the baby monitor. Increase or decrease the sensitivity to adjust the sound level needed to trigger the baby monitor feature.

This feature cannot be set during a monitoring

Handset

- Press [MENU] on the handset being monitored.
- 2 (♣): "Sensitivity level" → [SELECT]
- 3 [♠]: Select the desired setting. → [SAVE] → [OFF]

Answering the baby monitor

■ When monitoring with a unit:

Handset: Press [] to answer a call.

Base unit: Press [] to answer a call.

If you want to respond from the monitoring unit, press [MUTE].

 The monitoring unit will answer calls automatically when the auto intercom feature is set to "on" (page 18).

Note:

- If you receive an outside call when communicating with the monitored handset, the interrupt tone sounds.
 - To answer the call with the handset, press
 [OFF], then press
 - To answer the call with the base unit, press

 ¶ 3 times.*1
- *1 If [MUTE] is pressed, press [♣] 2 times.

■ When monitoring from an outside line:

Answer the call.

If you want to respond from your monitoring phone, press #IT using tone dialing. You can turn off the baby monitor feature by pressing #IO.

Note:

• The unit disconnects the call automatically after 2 minutes.

Other programming

Changing the handset name

The default handset name is "Handset 1" to "Handset 6". You can customize the name of each handset ("Bob", "Kitchen", etc.). This is useful when you make intercom calls between handsets. To display the handset name in standby mode, turn on the handset name display feature (page 35).

Handset

- 1 (MENU)#104
- **2** Enter the desired name (max. 10 characters).
- 3 [SAVE] \rightarrow [OFF]

Displaying the handset name

You can select whether or not the handset name is displayed in standby mode. The default setting is "Off".

Handset

- 1 [MENU]#105
- 2 [♠]: Select the desired setting. → [SAVE] → [OFF]

Registering a unit

Operating additional units

Additional handsets

Up to 6 handsets can be registered to the base unit.

Important:

 See page 4 for information on the available model.

Registering a handset to the base unit

The supplied handset and base unit are pre-registered. If for some reason the handset is not registered to the base unit, re-register the handset.

1 Handset:

(MENU)#130

2 Base unit:

Press and hold **[LOCATOR]** for about 5 seconds.

- If all registered handsets start ringing, press [LOCATOR] again to stop, then repeat this step.
- 3 Handset:

Press **[OK]**, then wait until a long beep sounds.

Deregistering a handset

A handset can cancel its own registration to the base unit, or other handsets registered to the same base unit. This allows the handset to end its wireless connection with the system.

Handset / Base unit

- 1 [MENU]#131
 - All handsets registered to the base unit are displayed.
- 2 [♣]: Select the handset you want to cancel.→ [SELECT]
- 3 (♣): "Yes" → [SELECT]
- **4** Proceed with the operation for your unit.

Handset: [OFF]
Base unit: [EXIT]

Using Call Display service

Important:

 This unit is Call Display compatible. To use Call Display features, you must subscribe to a Call Display service. Contact your phone service provider for details.

Call Display features

Handset / Base unit

When an outside call is being received, the caller information is displayed.

Caller information for the last 50 callers is logged in the caller list from the most recent call to the oldest

- If the unit cannot receive caller information, the following is displayed:
 - "Unavailable" 1" Unavailable Name & No." 2: The caller dials from an area which does not provide a Call Display service.
 - "Private caller": The caller requests not to send caller information.
 - "Long distance": The caller makes a long distance call.
- If the unit is connected to a PBX system, caller information may not be properly received.
 Contact your PBX supplier.
- *1 Handset
- *2 Base unit

Missed calls

Handset / Base unit

If a call is not answered, the unit treats it as a missed call. The display shows "Missed call".

Note

- Even when there are unviewed missed calls,
 "Missed call" disappears from the standby display if the following operation is performed by one of the units:
 - A handset is replaced on the charger.
 - Pressing [OFF] on a handset.
 - Pressing (EXIT) on the base unit.

Phonebook name display

When caller information is received and it matches a phone number stored in the phonebook, the stored name in the phonebook is displayed and logged in the caller list.

Talking Call Display

Handset / Base unit

This feature lets you know who is calling without looking at the display.

To use this feature, you must:

- subscribe to a Call Display service of your phone service provider.
- turn this feature on (page 29).

When caller information is received, the handsets and/or base unit announce the caller's name or phone number received from your phone service provider following every ring.

- Name pronunciation may vary. This feature may not pronounce all names correctly.
- Call Display service has a limit of how many characters can be displayed. If the caller's name is too long, the unit may not be able to display or announce the entire name.

Phonebook name announcement

When caller information is received and it matches a phone number stored in the phonebook, the stored name in the phonebook is announced.

For Call Waiting Deluxe service users

To use Call Waiting Deluxe, you must subscribe to Call Waiting Deluxe from your phone service provider. This feature not only allows the unit currently in use to display the 2nd caller's information, but also offers you a variety of ways to deal with the 2nd call.

Important:

- Please contact your phone service provider for details and availability of this service in your area.
- This feature must be turned on before it can be used.

To turn Call Waiting Deluxe on/off

Handset / Base unit

To use Call Waiting Deluxe, you must turn this feature on. The default setting is "Off".

- 1 [MENU]#215
- 2 (\$): Select the desired setting.
- 3 [SAVE]
- Proceed with the operation for your unit.
 Handset: [OFF]

Call Display Service

Base unit: [EXIT]

Call Waiting Deluxe service options

When a 2nd call is received, you can choose how to handle the call by selecting an option shown on the unit display.

Note:

 Your phone service provider may not offer all of the options (page 38).

the options (page 56).		
Displayed option	Function	
Answer	Answers the waiting call, while keeping the 1st call on hold.	
Hold	Holds the waiting call. The caller will hear the pre-recorded hold message played by your phone service provider.	
Announce	The caller will hear the pre-recorded busy message played by your phone service provider (for example, "We are not available now.") and will then be disconnected.	
Forward	Forwards the waiting call to the voicemail service provided by your phone service provider. You must subscribe to voicemail service to use this function.	
Drop	Disconnects (drops) the current call and answers the waiting call.	
Conference	Answers the waiting call and combines it with the current call to make a conference call (3-party call).	
Return	Returns to the waiting caller while keeping the current call on hold.	
Drop caller1	Disconnects (drops) the 1st call during a conference call.	
Drop caller2	Disconnects (drops) the 2nd call during a conference call.	

To use Call Waiting Deluxe service

Handset / Base unit

- 1 When you hear a Call Waiting tone during an outside call, press [FLASH].
 - The option menu is displayed.
- 2 (♠): Select the desired option. → [SELECT]
 - After selecting "Answer", "Hold", or "Conference", you can select another option. → [FLASH] → [♠]: Select the desired option. → [SELECT]

Note:

To exit from the option menu, wait for 20 seconds.

Caller list

Important:

 Make sure the unit's date and time setting is correct (page 13).

Viewing the caller list and calling back

Handset / Base unit

- 1 Proceed with the operation for your unit.
 - Handset: [▼] CID Base unit: [CID]
- 2 Press [▼] to search from the most recent call, or [▲] to search from the oldest call.
- 3 Proceed with the operation for your unit. Handset:
 - To call back, press [].
 - To exit, press [OFF].

Base unit:

- To call back, lift the corded handset.
- To exit, press [EXIT].

Note for handset and base unit:

- If the entry has already been viewed or answered, "✓" is displayed.
- In step 1, you can also access the caller list as follows:

Base unit:

[CALL LOG] \rightarrow [\updownarrow]: "Incoming call" \rightarrow [SELECT]

38

Editing a caller's phone number

You can edit a phone number in the caller list by adding the long distance code "1" or removing its area code.

Handset

- 1 [▼] CID
- 2 $[\ \ \]$: Select the desired entry. \rightarrow [MENU]
- **3** [♠]: "Edit" → [SELECT]
- 4 Press [EDIT] repeatedly until the phone number is shown in the desired format.
- 5 [~]

Base unit

- 1 [CID]
- 2 (\$): Select the desired entry.
- 3 Press [EDIT] repeatedly until the phone number is shown in the desired format.
- 4 Lift the corded handset.

Note:

 The number edited will not be saved in the caller list.

Erasing selected caller information

Handset / Base unit

- 1 Proceed with the operation for your unit. Handset: [▼] CID Base unit: [CID]
- 2 (\$): Select the desired entry.
- 3 [ERASE] \rightarrow [\diamondsuit]: "Yes" \rightarrow [SELECT]
- 4 Proceed with the operation for your unit. Handset: [OFF] Base unit: [EXIT]

Erasing all caller information

Handset / Base unit

- 1 Proceed with the operation for your unit. Handset: (▼) CID
 - Base unit: [CID]
- 2 [ERASE] \rightarrow [\updownarrow]: "Yes" \rightarrow [SELECT]
- 3 Proceed with the operation for your unit.

Handset: [OFF]
Base unit: [EXIT]

Answering system

The answering system can answer and record calls for you when you are unavailable to answer the phone.

You can also set the unit to play a greeting message but not to record caller messages by selecting "Greeting only" as the recording time setting (page 46).

Important:

 Make sure the unit's date and time setting is correct (page 13).

Memory capacity (including your greeting message)

The total recording capacity is about 15 minutes. A maximum of 64 messages can be recorded.

Note:

- When message memory becomes full:
 - "Messages full" is shown on the handset and base unit display.
 - on the base unit flashes rapidly if the answering system is turned on.
 - If you use the pre-recorded greeting message, the unit automatically switches to another pre-recorded greeting message asking callers to call again later.
 - If you recorded your own greeting message, the same message is still announced to callers even though their messages are not recorded.

Turning the answering system on/off

Base unit

Press [oo] to turn on/off the answering system.

Handset

1 To turn on: [MENU]#327 To turn off: [MENU]#328

2 [OFF]

Note for base unit and handset:

When the answering system is turned on, on the base unit lights up.

Greeting message

When the unit answers a call, a greeting message is played to callers.

You can use either:

- your own greeting message
- a pre-recorded greeting message

Recording your greeting message

You can configure this setting using either the base unit or one of the handsets.

Handset / Base unit

- 1 [MENU]#302
- 2 [♣]: "Yes" → [SELECT]
- 3 After a beep sounds, speak clearly about 20 cm (8 inches) away from the microphone (2 minutes max.).
- 4 Press [STOP] to stop recording.
- 5 Proceed with the operation for your unit. Handset: [OFF]

Base unit: [EXIT]

Using a pre-recorded greeting message

The unit provides 2 pre-recorded greeting messages:

- If you reset to pre-recorded greeting or do not record your own greeting message, the unit plays a pre-recorded greeting asking callers to leave a message.
- If the message recording time (page 46) is set to "Greeting only", callers' messages are not recorded and the unit plays a different pre-recorded greeting message asking callers to call again.

Resetting to a pre-recorded greeting message

If you change into a pre-recorded greeting message once you record your own greeting message, your own recorded greeting message is erased.

You can configure this setting using either the base unit or one of the handsets.

Handset / Base unit

- 1 (MENU)#304
- 2 [YES]
- 3 Proceed with the operation for your unit.

Handset: [OFF]
Base unit: [EXIT]

Playing back the greeting message

Handset / Base unit

- 1 [MENU]#303
- 2 Proceed with the operation for your unit. Handset: To exit, press [OFF]. Base unit: To exit, press [EXIT].

Listening to messages

Important:

- If your phone service provider offers voicemail service, the voicemail service may answer calls before the base unit's built-in answering system has a chance to answer calls and record messages.
 - In this case, messages you expect to be recorded by the answering system will be recorded on the voicemail service. For more information, see "For landline voicemail service subscribers" (page 45).
- When using the base unit or handset to listen to messages, the noise reduction feature (page 16) is activated automatically in spite of the setting (INI) is not displayed).

Using the base unit

When new messages have been recorded:

- [►■] on the base unit flashes.
- "New message" is displayed.

Press [►■] (PLAY).

- During playback, [►■] on the base unit lights.
- If new messages have been recorded, the base unit plays back new messages.
- If there are no new messages, the base unit plays back all messages.

Operating the answering system during playback

Key	Operation
[▲] or [▼]	Adjust the speaker volume
[144]	Repeat message*1
[>> 1]	Skip message
[PAUSE]	Pause message To resume playback, press [▶■].
【▶■】 (STOP)	Stop playback
[ERASE]	Erase currently playing message

*1 If pressed within the first 5 seconds of a message, the previous message is played.

Calling back (Call Display subscribers only)

Lift the corded handset during playback.

 To edit the number before calling back, press [EDIT] repeatedly until the phone number is shown in the desired format (page 39).

Erasing all messages

Press [ERASE] 2 times while the unit is not in use.

Using the handset

When new messages have been recorded, "New message" is displayed.

- 1 To listen to new messages:

 [MENU]#323

 To listen to all messages:

 [MENU]#324
- 2 When finished, press [OFF].

Note:

- To switch to the receiver, press [].
- You can also use the [PLAY] soft key, if displayed, to play new messages.

Operating the answering system

[MENU] \rightarrow [$\stackrel{\bullet}{\mathbf{v}}$]: "Answering device" \rightarrow [SELECT]

Key	Operation
[▲] or [▼]	Adjust the receiver/speaker volume (during playback)
1 or [◄]	Repeat message (during playback)*1

Key	Operation
2 or [►]	Skip message (during playback)
3	Enter the "Settings" menu
4	Play new messages
5	Play all messages
6	Play greeting message
76	Record greeting message
8	Turn answering system on
[PAUSE]	Pause message*2
9 or [STOP]	Stop recording Stop playback
0	Turn answering system off
¥ 4*³	Erase currently playing message
* 5	Erase all messages
* 6	Reset to a pre-recorded greeting message

- *1 If pressed within the first 5 seconds of a message, the previous message is played.
- *2 To resume playback:

[♦]: "Playback" → [SELECT]

*3 You can also erase as follows:

[PAUSE] → [♠]: "Erase" → [SELECT]

→ [♠]: "Yes" → [SELECT]

Calling back (Call Display subscribers only)

- 1 Press [PAUSE] during playback.
- 2 (♣): "Call back" → [SELECT]

Editing the number before calling back

- 1 Press [PAUSE] during playback.
- 2 (♣): "Edit & Call" → [SELECT]

Erasing all messages

- 1 (MENU)#325
- 2 (♣): "Yes" → [SELECT] → [OFF]

Advanced new message alerting features

Audible message alert

This feature allows the base unit to beep to inform you of a new message arrival when new messages are recorded. The base unit beeps 2 times every minute until you listen to the messages, if the "Base unit beep" setting is turned on. The default setting is "Off".

You can configure this setting using either the base unit or one of the handsets.

Handset / Base unit

- 1 [MENU]#339
- **2** [♣]: Select the desired setting. → [SAVE]
- 3 Proceed with the operation for your unit. Handset: [OFF]

Base unit: [EXIT]

New message alert by a call

This feature allows you to receive a notification by phone when new messages are recorded. The base unit calls a phone number you specify. You can then operate the answering system remotely to listen to the new message.

To use this feature, you must:

- store a phone number to which the unit makes the call to.
- turn on the new message alert setting.
 After you answer the new message alert call, you can listen to messages from that call (page 44).
 You can configure this setting using either the base unit or one of the handsets.

Important:

 A new message alert is stopped 1 minute after the unit starts to call. The unit will not retry the call even if the call is not answered.

Storing a phone number to which the unit makes an alert call

Handset

- From the phonebook:
 - 1 [MENU]#338

- 2 [♣]: "Notification to" → [SELECT]
 → [ADD]
- 3 [♣]: "Phonebook" → [SELECT]
- 4 [♣]: Select the desired phonebook entry.
 → [SAVE] → [OFF]

■ By entering a phone number:

- 1 [MENU]#338
- 2 [♣]: "Notification to" → [SELECT]
 → [ADD]
- 3 [♣]: "Manual" → [SELECT]
- 4 Enter the desired name (16 characters max.). → [OK]
- Enter the desired number (24 digits max.).
 → [OK] → [SELECT] → [OFF]

Base unit

■ From the phonebook:

- 1 [MENU]#338
- 3 [♠]: Select the desired phonebook entry.
 → [SAVE] → [EXIT]

■ By entering a phone number:

- 1 (MENU)#338
- 2 [♣]: "Notification to" → [SELECT]
 → [EDIT]
- 3 Enter the desired name (16 characters max.). → [OK]
- 4 Enter the desired number (24 digits max.).
 → [OK] → [SELECT] → [EXIT]

Turning on/off the new message alert setting

Handset / Base unit

- 1 [MENU]#338
- **2** [♣]: "On/Off" → [SELECT]
- **3** (♣): Select the desired setting. → **(SAVE)**
- 4 Proceed with the operation for your unit. Handset: [OFF] Base unit: [EXIT]

Editing the set phone number

Handset

- 1 [MENU]#338
- 2 (♣): "Notification to" → [SELECT]

- $[MENU] \rightarrow [\]: "Edit" \rightarrow [SELECT]$
- 4 Edit the name if necessary (16 characters max.). → [OK]
- 5 Edit the phone number if necessary (24 digits max.). \rightarrow [OK] \rightarrow [SELECT] \rightarrow [OFF]

Base unit

- 1 (MENU)#338
- 2 [♣]: "Notification to" → [SELECT] →
 [EDIT]
- 3 Edit the name if necessary (16 characters max.). → [OK]
- **4** Edit the phone number if necessary (24 digits max.). → [OK] → [SELECT] → [EXIT]

Erasing the set phone number

Handset

- 1 [MENU]#338
- 2 [♣]: "Notification to" → [SELECT]
- 3 [MENU] \rightarrow [\updownarrow]: "Erase" \rightarrow [SELECT]
- 4 [♣]: "Yes" → [SELECT] → [OFF]
 - The new message alert setting is turned off.

Base unit

- 1 [MENU]#338
- 2 [♠]: "Notification to" → [SELECT] →
 [ERASE]
- 3 (♣): "Yes" → [SELECT] → [EXIT]
 - The new message alert setting is turned off.

Activating/inactivating the remote access code to play messages

If you activate this feature, you must enter the remote access code (page 44) to play the new message from the new message alert call. This is so that unauthorized parties cannot listen to your messages. The default setting is "Inactivate".

- "Inactivate": You can listen to the message by pressing 4 to play new messages (without entering the remote access code).
- "Activate": You must enter your remote access code and then press 4 to play new message.

Handset / Base unit

- 1 [MENU]#338
- 2 (♣): "Remote code" → [SELECT]
- **3** (♣): Select the desired setting. → **(SAVE)**

4 Proceed with the operation for your unit. Handset: [OFF]

Base unit: [EXIT]

Listening to messages

After you answer the new message alert, you can listen to the messages as follows.

■ When the remote access code is set to "Inactivate":

Press 4 to play the new message during the announcement.

- When the remote access code is set to "Activate":
 - 1 Enter the remote access code (page 44) during the announcement.
 - 2 Press 4 to play the new message.

Note:

- Within 10 seconds after listening to new messages, you can press # 9 during the call to turn off the new message alert by a call feature.
- Even if the unit makes a new message alert call, the handset redial list does not show the record.
 However, on the base unit redial list it is shown as "Message alert".

Remote operation

Using a touch-tone phone, you can call your phone number from outside and access the unit to listen to messages or change answering system settings. The unit's voice guidance prompts you to press certain dial keys to perform different operations.

Remote access code

A 3-digit remote access code must be entered when operating the answering system remotely. This code prevents unauthorized parties from listening to your messages remotely. The default setting is "111".

You can configure this setting using either the base unit or one of the handsets.

Important:

 To prevent unauthorized access to this product, we recommend that you regularly change the remote code.

Handset / Base unit

- 1 [MENU]#306
- **2** Enter the desired 3-digit remote access code.
- 3 [SAVE]
- 4 Proceed with the operation for your unit. Handset: [OFF]

Base unit: [EXIT]

Deactivating remote operation

Press ★ in step 2 on "Remote access code", page 44.

• The entered remote access code is deleted.

Using the answering system remotely

- Dial your phone number from a touch-tone phone.
- 2 After the greeting message starts, enter your remote access code.
- 3 Follow the voice guidance prompts as necessary or control the unit using remote commands (page 44).
- 4 When finished, hang up.

Voice guidance

During remote operation, the unit's voice guidance starts and prompts you to press 1 to perform a specific operation, or press 2 to listen to more available operations.

Note:

 If you do not press any dial keys within 10 seconds after a voice guidance prompt, the unit disconnects your call.

Remote commands

You can press dial keys to access certain answering system functions without waiting for the voice guidance to prompt you.

Key	Operation
1	Repeat message (during playback)*1
2	Skip message (during playback)
4	Play new messages
5	Play all messages
9	Stop playback
0	Turn answering system off

Key	Operation
* 4	Erase currently playing message
X 5	Erase all messages
* #	End remote operation (or hang up)

*1 If pressed within the first 5 seconds of a message, the previous message is played.

Turning on the answering system remotely

- **1** Dial your phone number from a touch-tone phone.
- 2 Let the phone ring 15 times.
 - A long beep is heard.
- 3 Enter your remote access code within 10 seconds after the long beep.
 - The greeting message is played back.
 - You can either hang up, or enter your remote access code again and begin remote operation (page 44).

Answering system settings

Call screening

Handset / Base unit

While a caller is leaving a message, you can listen to the call through the unit's speaker.

To adjust the speaker volume, press [▲] or [▼] repeatedly.

You can answer the call by:

- lifting the corded handset from the base unit, or
- pressing () on the handset.

Call screening can be set for each unit. The default setting is "on".

- 1 [MENU]#310
- **2** (♣): Select the desired setting. → **(SAVE)**
- 3 Proceed with the operation for your unit. Handset: [OFF] Base unit: [EXIT]

Number of rings before the unit answers a call

You can change the number of times the phone rings "Ring count" before the unit answers

calls. You can select 2 to 7 rings, or "Toll saver".

The default setting is "4 rings".

"Toll saver": The unit's answering system answers at the end of the 2nd ring when new messages have been recorded, or at the end of the 5th ring when there are no new messages. If you call your phone from outside to listen to new messages (page 44), you know that there are no new messages when the phone rings for the 3rd time. You can then hang up without being charged for the call.

You can configure this setting using either the base unit or one of the handsets.

Handset / Base unit

- 1 [MENU]#211
- 2 (♣): Select the desired setting. → (SAVE)
- **3** Proceed with the operation for your unit.

Handset: [OFF]
Base unit: [EXIT]

For landline voicemail service subscribers

If you subscribe to a flat-rate service package that includes Call Display, Call Waiting, voicemail, and unlimited local/regional/long distance calls, please note the following:

- To use the voicemail service provided by your phone service provider rather than the unit's answering system, turn off the answering system (page 40).
- To use this unit's answering system rather than the voicemail service provided by your phone service provider, please contact your phone service provider to deactivate your voicemail service

If your phone service provider cannot do this:

- Set this unit's "Ring count" setting so that
 this unit's answering system answers calls
 before the voicemail service of your phone
 service provider does. It is necessary to
 check the number of rings required to activate
 the voicemail service provided by your phone
 service provider before changing this setting.
- Change the number of rings of the voicemail service so that the answering system can answer the call first. To do so, contact your phone service provider.

Caller's recording time

You can change the maximum message recording time allowed for each caller. The default setting is "3 min".

You can configure this setting using either the base unit or one of the handsets.

Handset / Base unit

- 1 [MENU]#305
- **2** [♣]: Select the desired setting. → [SAVE]
- 3 Proceed with the operation for your unit. Handset: [OFF]

Base unit: [EXIT]

Selecting "Greeting only"

You can select "Greeting only" which sets the unit to announce a greeting message to callers but not record messages.

Select "Greeting only" in step 2 on "Caller's recording time", page 46.

Note:

- When you select "Greeting only":
 - If you do not record your own message, the unit will play the pre-recorded greeting-only message asking callers to call again later.
 - If you use your own message, record the greeting-only message asking callers to call again later (page 40).

Voicemail service

Voicemail is an automatic answering service offered by your phone service provider. After you subscribe to this service, your phone service provider's voicemail system answers calls for you when you are unavailable to answer the phone or when your line is busy. Messages are recorded by your phone service provider, not your telephone. Please contact your phone service provider for details of this service.

Important:

 To use the voicemail service provided by your phone service provider rather than the unit's answering system, turn off the answering system (page 40). For details, see page 45.

Storing the voicemail (VM) access number

In order to listen to your voicemail messages, you must dial your phone service provider's voicemail access number. Once you have stored your voicemail access number, you can dial it automatically (page 47).

You can configure this setting using either the base unit or one of the handsets.

Handset / Base unit

- 1 (MENU)#331
- 2 Enter your access number (24 digits max.). → [SAVE]
- 3 Proceed with the operation for your unit. Handset: [OFF] Base unit: [EXIT]

Note:

 When storing your voicemail access number and your mailbox password, press [A] (Pause) on the handset or [PAUSE] on the base unit to add pauses (page 14) between the access number and the password as necessary.
 Contact your phone service provider for the required pause time.

Example:

 1-222-333-4444
 PPPP
 8888

 VM access number
 Pauses
 Password

To erase the voicemail access number

Handset / Base unit

- 1 (MENU)#331
- 2 Press and hold [CLEAR] until all digits are erased. → [SAVE]
- 3 Proceed with the operation for your unit. Handset: [OFF] Base unit: [EXIT]

Voicemail (VM) tone detection

Handset / Base unit

Your phone service provider sends special signals (sometimes called "voicemail tones" or "stutter tones") to the unit to let you know you have new voicemail messages. If you hear a series of dial tones followed by a continuous dial tone after you press [) on the handset or lift the corded handset, you have new voicemail messages. Soon after you hang up a call or after the phone stops ringing, your unit checks the phone line to see if new voicemail messages have been recorded.

Turn this feature off when:

- You do not subscribe to voicemail service.
- Your phone service provider does not send voicemail tones.
- Your phone is connected to a PBX.
 If you are not sure which setting is required, contact your phone service provider.

Turning VM tone detection on/off

The default setting is "on".

You can configure this setting using either the base unit or one of the handsets.

Handset / Base unit

- 1 [MENU]#332
- 2 (♣): Select the desired setting. → [SAVE]
- 3 Proceed with the operation for your unit.

Handset: [OFF]
Base unit: [EXIT]

Listening to voicemail messages

When new messages have been recorded, "Voicemail msg. via phone co." is displayed if message indication service is available.

Handset / Base unit

- 1 [MENU]#330
 - The speakerphone turns on.
 - Lift the corded handset if needed.
- **2** Follow the pre-recorded instructions.
- 3 When finished, hang up.

Note

- You can also use the [ACCESS] soft key, if displayed, to play new voicemail messages.
- If the handset and base unit still indicate there are new messages even after you have listened to all new messages, turn it off by pressing and holding # until the handset or base unit beeps.

Wall mounting


The base unit can be mounted on a wall by changing the wall mounting adaptor's position.

Note:


 Make sure that the wall and the fixing method are strong enough to support the weight of the unit.

Base unit


1 To remove the wall mounting adaptor, push down the release levers (1). Remove the adaptor (2).



- 2 ① Turn the adaptor so that the words "UP WALL" are facing up.
 - ② Tuck the telephone line cord inside the wall mounting adaptor.
 - (3) Connect the AC adaptor cord and telephone line cord.




- 3 Insert the lower tabs of the adaptor into the unit's bottom slots (1), then insert by pushing down the levers of the adaptor into the upper slots (2).
 - The words "UP WALL" should be facing up.



- **4** Mount the unit on a wall then slide down to secure in place.
 - This product is compliant with the following wall phone plate sizes (2 types).
 - **A** 83 mm (3 ¹/₄ inches)
 - **3** 102 mm (4 inches)

Fit the slots of the unit onto the corresponding wall phone plate tabs for


(**(**) and (**(**)) respectively.



Charger

Drive the screws (**(A)**) (not supplied) into the wall.

B 27.2 mm (1 ¹/₁₆ inches)



Error messages

Display message	Cause/solution
Ask phone company for VM access #	You have not stored the voicemail access number. Store the number (page 47).
Base no power Or No link. Re- connect base AC adaptor.	 Confirm the base unit's AC adaptor is connected to the unit and the power outlet correctly. The handset has lost communication with the base unit. Move closer to the base unit and try again. Unplug the base unit's AC adaptor to reset the unit. Reconnect the adaptor and try again. The handset's registration may have been cancelled. Re-register the handset (page 36).
Busy	 The called unit is in use. Other units are in use and the system is busy. Try again later. The handset you are using is too far from the base unit. Move closer and try again.
Check tel line	The supplied telephone line cord has not been connected yet or not connected properly. Check the connections (page 8).
Error!!	Recording was too short. Try again.
Invalid	 There is no handset registered to the base unit matching the handset number you entered. The handset is not registered to the base unit. Register the handset (page 36).
Requires subscription to Caller ID.	 You must subscribe to a Call Display service. Once you receive caller information after subscribing to a Call Display service, this message will not be displayed.
Use rechargeable battery.	 A wrong type of battery such as alkaline or manganese was inserted. Use only the rechargeable Ni-MH batteries noted on page 4, 5.

Troubleshooting

If you still have difficulties after following the instructions in this section, disconnect the base unit's AC adaptor, then reconnect the base unit's AC adaptor. Remove the batteries from the handset, and then insert them into the handset again.

If the base unit batteries for power backup are installed, remove the batteries from the base unit, and then insert them into the base unit again.

General use

Problem	Cause/solution
The handset does not turn on even after installing charged batteries.	Place the handset on the charger to turn on the handset.

For assistance, visit www.panasonic.ca/english/support

50

Problem	Cause/solution
The unit does not work.	 Make sure the batteries are installed correctly (page 8). Fully charge the batteries (page 9). Check the connections (page 8). Unplug the base unit's AC adaptor to reset the unit. Reconnect the adaptor and try again. The handset has not been registered to the base unit. Register the handset (page 36).
I cannot hear a dial tone.	 The base unit's AC adaptor or telephone line cord is not connected. Check the connections. Disconnect the base unit from the telephone line and connect the line to a known working telephone. If the working telephone operates properly, contact our service personnel to have the unit repaired. If the working telephone does not operate properly, contact your phone service provider.
The base unit beeps.	New messages have been recorded. Listen to the new messages (page 41).
The unit does not work during a power failure.	 You can insert 2 AAA (R03) batteries (not supplied) into the base unit that will power the unit temporarily in the event of a power failure (page 9). The base unit display is blank if the saving mode is "on" (page 10).

Menu list

Problem	Cause/solution
The display is in a language I cannot read.	Change the display language (page 12).
I cannot register a handset to a base unit.	The maximum number of handsets (6) is already registered to the base unit. Cancel unused handset registrations from the base unit (page 36).

Battery recharge

Problem	Cause/solution
The handset beeps and/or a flashes.	Battery charge is low. Fully charge the batteries (page 9).
I fully charged the batteries, but - ☐ still flashes, - ☐ is displayed, or - the operating time seems to be shorter.	 Clean the battery ends (⊕, ⊖) and the charge contacts with a dry cloth and charge again. It is time to replace the batteries (page 8).

Making/answering calls, intercom

Problem	Cause/solution
y is displayed.	 The handset is too far from the base unit. Move closer. The base unit's AC adaptor is not properly connected. Reconnect AC adaptor to the base unit. The handset is not registered to the base unit. Register it (page 36).

For assistance, visit www.panasonic.ca/english/support

51

Problem	Cause/solution
Noise is heard, sound cuts in and out.	 You are using the handset or base unit in an area with high electrical interference. Re-position the base unit and use the handset away from sources of interference. Move closer to the base unit. If you use a DSL/ADSL service, we recommend connecting a DSL/ADSL filter between the base unit and the telephone line jack. Contact your DSL/ADSL provider for details.
The handset or base unit does not ring.	 The ringer volume is turned off. Adjust the ringer volume (page 15, 29). Night mode is turned on. Turn it off (page 15, 33).
I cannot make a call.	The dialing mode may be set incorrectly. Change the setting (page 13).
I cannot make long distance calls.	Make sure that you have long distance service.

Call Display/Talking Call Display

Problem	Cause/solution	
Caller information is not displayed.	 You must subscribe to Call Display service. Contact your phone service provider for details. If your unit is connected to any additional telephone equipment such as a Call Display box or cordless telephone line jack, plug the unit directly into the wall jack. If you use a DSL/ADSL service, we recommend connecting a DSL/ADSL filter between the base unit and the telephone line jack. Contact your DSL/ADSL provider for details. The name display service may not be available in some areas. Contact your phone service provider for details. Other telephone equipment may be interfering with this unit. Disconnect the other equipment and try again. 	
Caller information is displayed or announced late.	 Depending on your phone service provider, the unit may display or announce the caller's information at the 2nd ring or later. Move closer to the base unit. 	
Caller information is not announced.	 The ringer volume is turned off. Adjust the ringer volume (page 29). The Talking Call Display feature is turned off. Turn it on (page 29). The number of rings for the answering system is set to "2 rings" or "Toll saver". Select a different setting (page 45). If the base unit and another handset are having an intercom call, your handset does not announce caller information. 	
I cannot dial the phone number edited in the caller list.	The phone number you dialed might have been edited incorrectly (for example, the long distance "1" or the area code is missing). Edit the phone number with another pattern (page 39).	
Time on the unit has shifted.	• Incorrect time information from incoming Call Display changes the time. Set the time adjustment to "Manual" (off) (page 29).	

Problem	Cause/solution
The 2nd caller's information is not displayed during an outside call. (Visual Call Waiting feature does not function.)	 In order to use Call Display, Call Waiting, or Visual Call Waiting, you must first contact your phone service provider and subscribe to the desired service. After subscribing, you may need to contact your phone service provider again to activate this specific service, even if you already subscribed to both Call Display and Visual Call Waiting services.

Answering system

Problem	Cause/solution
The unit does not record new messages.	 The answering system is turned off. Turn it on (page 40). The message memory is full. Erase unnecessary messages (page 41, 42). The recording time is set to "Greeting only". Change the setting (page 46). Your phone service provider's voicemail service may be answering your calls before the unit's answering system can answer your calls. Change the unit's number of rings setting (page 45) to a lower value, or contact your phone service provider. The answering system will not answer incoming calls while the other devices such as handsets are engaged in a call.
I cannot operate the answering system remotely.	 The remote access code is not set. Set the remote access code (page 44). You are entering the wrong remote access code. If you have forgotten your remote access code, enter the remote access code setting to check your current code (page 44). The answering system is turned off. Turn it on (page 45).
The unit does not emit the specified number of rings.	If the ring once setting is turned off (page 20), the number of rings decreases by 1 from the specified number of rings.

Voicemail

Problem	Cause/solution
"Voicemail msg. via phone co." is shown on the display. How do I remove this message from the display?	• This notification is displayed when your phone service provider's voicemail service (not the unit's answering system) has recorded a message for you. Typically you can remove this notification from the display by listening to the message. To listen to the message, dial the voicemail number provided by your phone service provider (for most cases, this will be your own phone number), and follow the voice instructions. Depending on your phone service provider, you may need to remove all messages from your voice mailbox to remove the notification. You can also remove this notification by pressing and holding # until the unit beeps.

Liquid damage

Problem	Cause/solution
Liquid or other form of moisture has entered the handset/base unit.	Disconnect the AC adaptor and telephone line cord from the base unit. Remove the batteries from the handset and leave to dry for at least 3 days. After the handset/base unit are completely dry, reconnect the AC adaptor and telephone line cord. Insert the batteries and charge fully before use. If the unit does not work properly, contact an authorized service centre.

Caution:

• To avoid permanent damage, do not use a microwave oven to speed up the drying process.

Industry Canada Notices and other information

NOTICE:

This equipment meets the applicable Industry Canada Terminal Equipment Technical Specifications. This is confirmed by the registration number. The abbreviation, "IC:", before the registration number signifies that registration was performed based on a Declaration of Conformity indicating that Industry Canada technical specifications were met. It does not imply that Industry Canada approved the equipment.

Users should ensure, for their own protection, that the electrical ground connections of the power utility, telephone lines and internal metallic water pipe system, if present, are connected together. This precaution may be particularly important in rural areas.

NOTICE:

The Ringer Equivalence Number (REN) assigned to each terminal device provides an indication of the maximum number of terminals allowed to be connected to a telephone interface. The termination on an interface may consist of any combination of devices subject only to the requirement that the sum of the Ringer Equivalence Numbers of all the devices does not exceed 5.

The Ringer Equivalence Number (REN) of this unit: (found on the bottom of the unit).

NOTICE:

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Privacy of communications may not be ensured when using this telephone.

Some cordless telephones operate at frequencies that may cause interference to nearby TVs and VCRs. To minimize or prevent such interference, the base of the cordless telephone should not be placed near, or on top of, a TV or VCR. If interference is experienced, move the cordless telephone further away from the TV or VCR. This will often reduce, or eliminate, interference.

RF Exposure Warning:

- This product complies with IC radiation exposure limits set forth for an uncontrolled environment.
- To comply with IC RF exposure requirements, the base unit must be installed and operated 20 cm (8 inches) or more between product and all person's body.
- This product may not be collocated or operated in conjunction with any other antenna or transmitter.
- The handset may be carried and operated with only the specific provided belt clip. Other non-tested belt clips or similar body-worn accessories may not comply and must be avoided.

Warranty

Panasonic Canada Inc. 5770 Ambler Drive, Mississauga, Ontario L4W 2T3 PANASONIC PRODUCT - LIMITED WARRANTY

EXCHANGE PROGRAM

Panasonic Canada Inc. warrants this product to be free from defects in material and workmanship under normal use and for a period as stated below from the date of original purchase agrees to, at its option either (a) repair your product with new or refurbished parts, (b) replace it with a new or a refurbished equivalent value product, or (c) refund your purchase price. The decision to repair, replace or refund will be made by Panasonic Canada Inc.

Telephone Accessory / Product

One (1) year

This warranty is given only to the original purchaser, or the person for whom it was purchased as a gift, of a Panasonic brand product mentioned above sold by an authorized Panasonic dealer in Canada and purchased and used in Canada, which product was not sold "as is", and which product was delivered to you in new condition in the original packaging.

IN ORDER TO BE ELIGIBLE TO RECEIVE WARRANTY SERVICE HEREUNDER, A PURCHASE RECEIPT OR OTHER PROOF OF DATE OF ORIGINAL PURCHASE, SHOWING AMOUNT PAIDAND PLACE OF PURCHASE IS REQUIRED

LIMITATIONS AND EXCLUSIONS

This warranty ONLY COVERS failures due to defects in materials or workmanship, and DOES NOT COVER normal wear and tear or cosmetic damage. The warranty ALSO DOES NOT COVER damages which occurred in shipment, or failures which are caused by products not supplied by Panasonic Canada Inc., or failures which result from accidents, misuse, abuse, neglect, mishandling, misapplication, alteration, faulty installation, set-up adjustments, misadjustment of consumer controls, improper maintenance, improper batteries, power line surge, lightning damage, modification, introduction of sand, humidity or liquids, commercial use such as hotel, office, restaurant, or other business or rental use of the product, or service by anyone other than a Authorized Servicer, or damage that is attributable to acts of God.

Rechargeable batteries are warranted for ninety (90) days from date of original purchase.

THIS EXPRESS, LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT WILL PANASONIC CANADA INC. BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THIS PRODUCT OR ARISING OUT OF ANY BREACH OF ANY EXPRESS OR IMPLIED WARRANTY. (As examples, this warranty excludes damages for lost time, travel to and from the Authorized Servicer, loss of or damage to media or images, data or other memory or recorded content. This list of items is not exhaustive, but for illustration only.)

In certain instances, some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, or the exclusion of implied warranties, so the above limitations and exclusions may not be applicable. This warranty gives you specific legal rights and you may have other rights which vary depending on your province or territory.

CONTACT INFORMATION

For product information and operation assistance, please visit our Support page:

www.panasonic.ca/english/support

For defective product exchange within the warranty period, please contact the original dealer.

For assistance, visit www.panasonic.ca/english/support

56

Index

3-way conference: 16A Additional handset: 36

Alarm: 32

Answering calls: 15 Answering system Call screening: 45

Erasing messages: 41, 42, 45 Greeting message: 40 Greeting only: 46

Listening to messages: 41, 44
New message alerting: 42
Number of rings: 45
Recording time: 46
Remote access code: 44
Remote operation: 44
Ring count: 45
Toll saver: 45

Toll saver: 45
Turning on/off: 40
Auto intercom: 18
Auto talk: 15, 30

B Baby monitor: 33 Battery: 8, 10

Battery saving mode: 10
Booster (Clarity booster): 16
C C.WTG (Call Waiting Deluxe): 37

Call block: 19

One ring for blocked call: 20 Call Display service: 37

Call bishare: 16
Call Waiting: 16
Caller list: 38
Caller list edit: 39
Chain dial: 24
CID (Call Display): 38

Conference calls: 16 Control type: 11, 12 Customer support: 31

D Date and time: 13Dialing mode: 13Direct command code: 27

Display
Contrast: 30
Language: 12
E Eco mode: 10

Equalizer: 16
Error messages: 50
F Flash: 15, 31

G Groups: 23
H Handset

Deregistration: 36

Locator: 11 Name: 35 Registration: 36

Hold: 15
Intercom: 18

K Key detector: 29, 32 Key tone: 30

L Line mode: 31

M Making calls: 14
Missed calls: 37

Mute: 15

N Night mode: 33
Noise reduction: 16

O One-touch dial buttons: 25

P Pause: 14 Phonebook: 22

Power failure (power backup operation): 9

Privacy mode: 31

R Redialing: 14
Ringer ID: 23
Ringer tone: 29

Rotary/pulse service: 16

S Speed dial: 24 SP-PHONE (Speakerphone): 14

T Talking Call Display: 37
 Temporary tone dialing: 16
 Time adjustment: 29
 Transferring calls: 16
 Troubleshooting: 50

 V Visual Call Waiting: 16

VM (Voicemail): 47

Voice guidance language: 13

Voicemail: 45, 47 Volume

Receiver: 14

Ringer (Base unit): 15, 29 Ringer (Handset): 15, 29

Speaker: 14

W Wall mounting: 48

Notes

Notes

59

_				
For	vour	future	retere	nce

We recommend keeping a record of the following information to assist with any repair under warranty.

Serial No.	Date of purchase
(found on the bottom of the base unit)	
Name and address of dealer	

Attach your purchase receipt here.

Panasonic Canada Inc. 5770 Ambler Drive, Mississauga, Ontario L4W 2T3

© Panasonic System Networks Co., Ltd. 2014

Printed in China

PNQX6716ZA

PNQX6716ZA TT1214KT0 (E)

TGF3xxC(en)_1216_ver011.pdf 60

2014/12/16 19:11:03